

Urban Sanitation & Public Health

MAIN CONCEPTS

LEARNING

OBSERVING

THINKING

+

+

THEORY

ENVIRONMENT

HYPOTHESIS

KHIN MAUNG YI – VICE CHAIR , MES – WATSAN TD

ENVIRONMENTAL SANITATION (10 Cs)

- 1. Safe Drinking Water**
- 2. Sewage Treatment (S.Pit, Septic Tank, IMT, TF, AS, MF)**
- 3. Refuse Disposal (Dump^N: San. LF, CP, Incen^N: Hog Feed^N:)**
- 4. Personal Hygiene**
- 5. Environmental & Soil (free Disease Produc^N: Bat, Path: Organism)**
- 6. General Sanitation (Building orientation to all)**
- 7. Air Sanitation (Pollution, CO₂, CO, H₂S, NO, CLFLC, CH₄, NH₃)**
- 8. Lighting (minimum 50 foot candle=60 Watts for reading)**
- 9. Ventilation (30%-40% of walling, 50-70ft²/c, 35m³/c.hr)**
- 10. Sound Sanitation (Noise Control <80 decibel)**

Source: Environmental Engg; & Sanitation- Joseph A. Salvato New York Nov: 1971

What is Sanitation?

A) Definitions **Excreta & liquid wastes** **hygienic way disposing**

a)
Sanitation is the means of collecting and disposing of excreta and liquid wastes in a hygienic way so as not to endanger the health of individuals or the community as a whole. [1]



B) **Reduce pathogens spread & maintain healthy living environment**



b) *(less common)*
General term used to describe a battery of actions that all aim to reduce the spread of pathogens and maintain a healthy living environment. Specific actions related to sanitation include wastewater treatment, solid waste management and stormwater management. [2]

C) **Municipal Concerns – Wastewater T, Solid W T, Strom W Management**

So it mostly addresses on– WW treatment, solid waste T & storm water management

WORLD = 7000 Million

35% Global

Sanitation Challenges


WITHOUT Sanitation

eawag
aquatic research 000




1. INDIA-818 2. CHINA-607 3. INDONESIA-109 4. NIGERIA-103 5. BANGLADESH-75

What Waste, Resource and Management Systems Are We Dealing With?

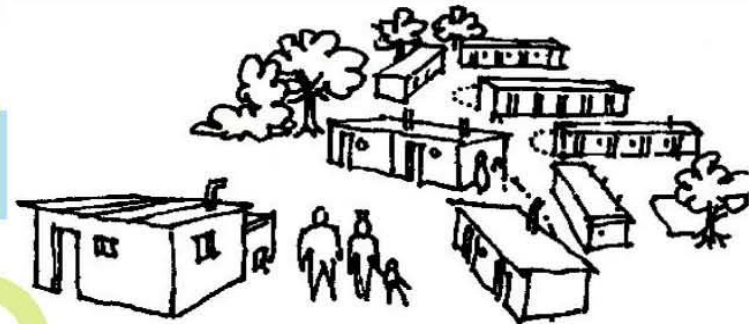

Water supply

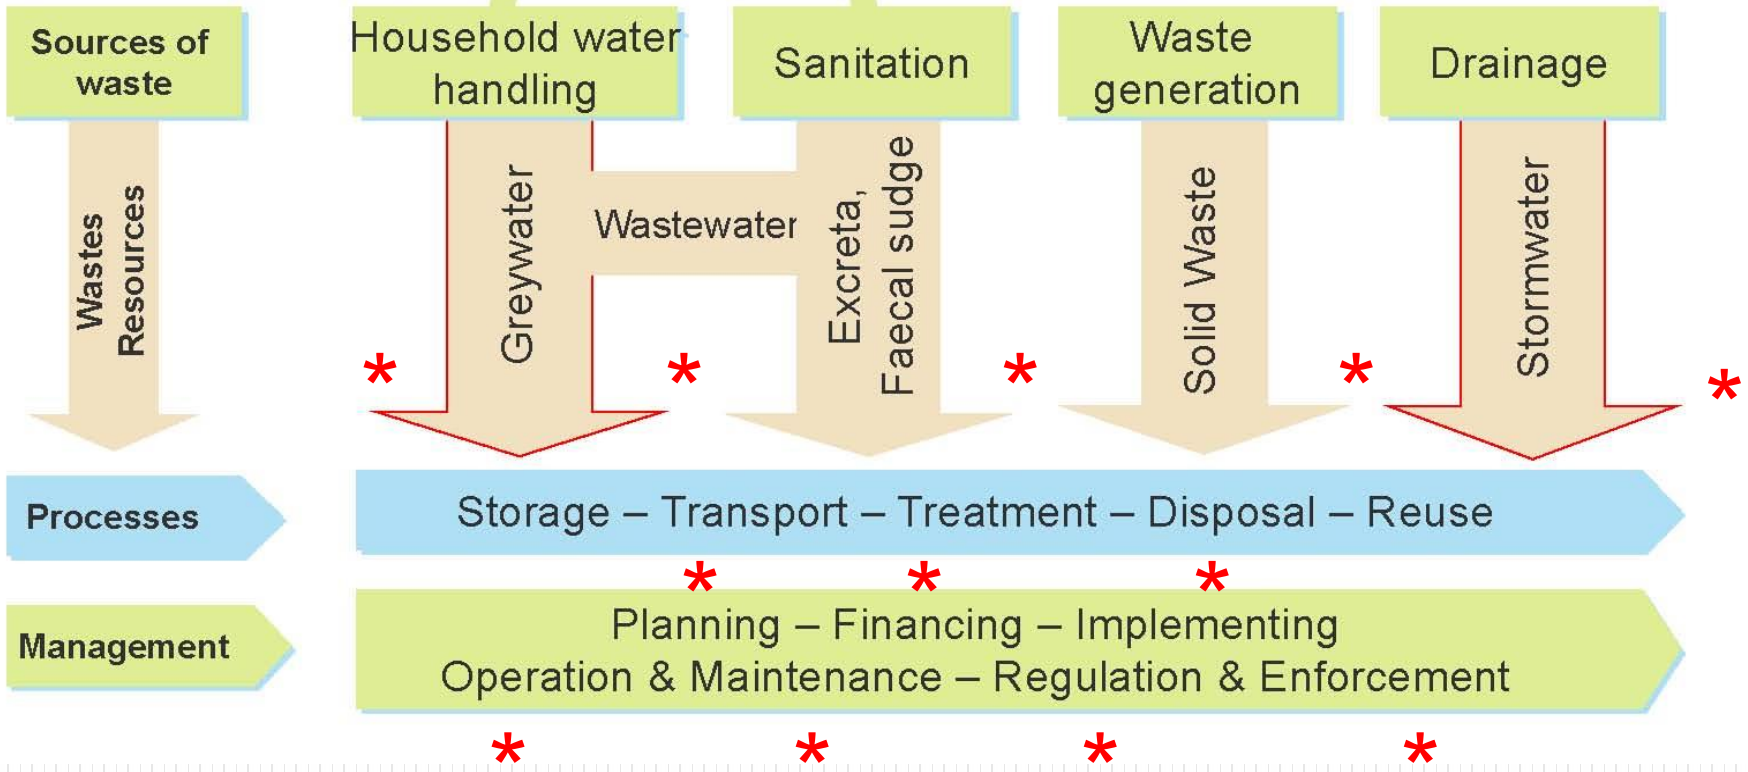


URBAN


Sanitation Challenges: Urban

- Greatest socio-economic & technical challenges
- Disease transmission – public health
- The numbers !
- Simple (rural) versus complex (urban) solutions


URBAN –Complex **RURAL** - Simple

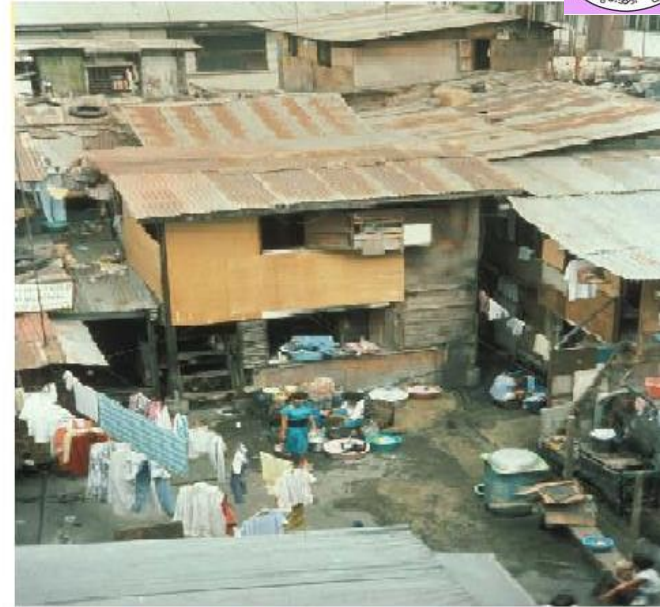

The Water Cycle and Related Urban Infrastructure

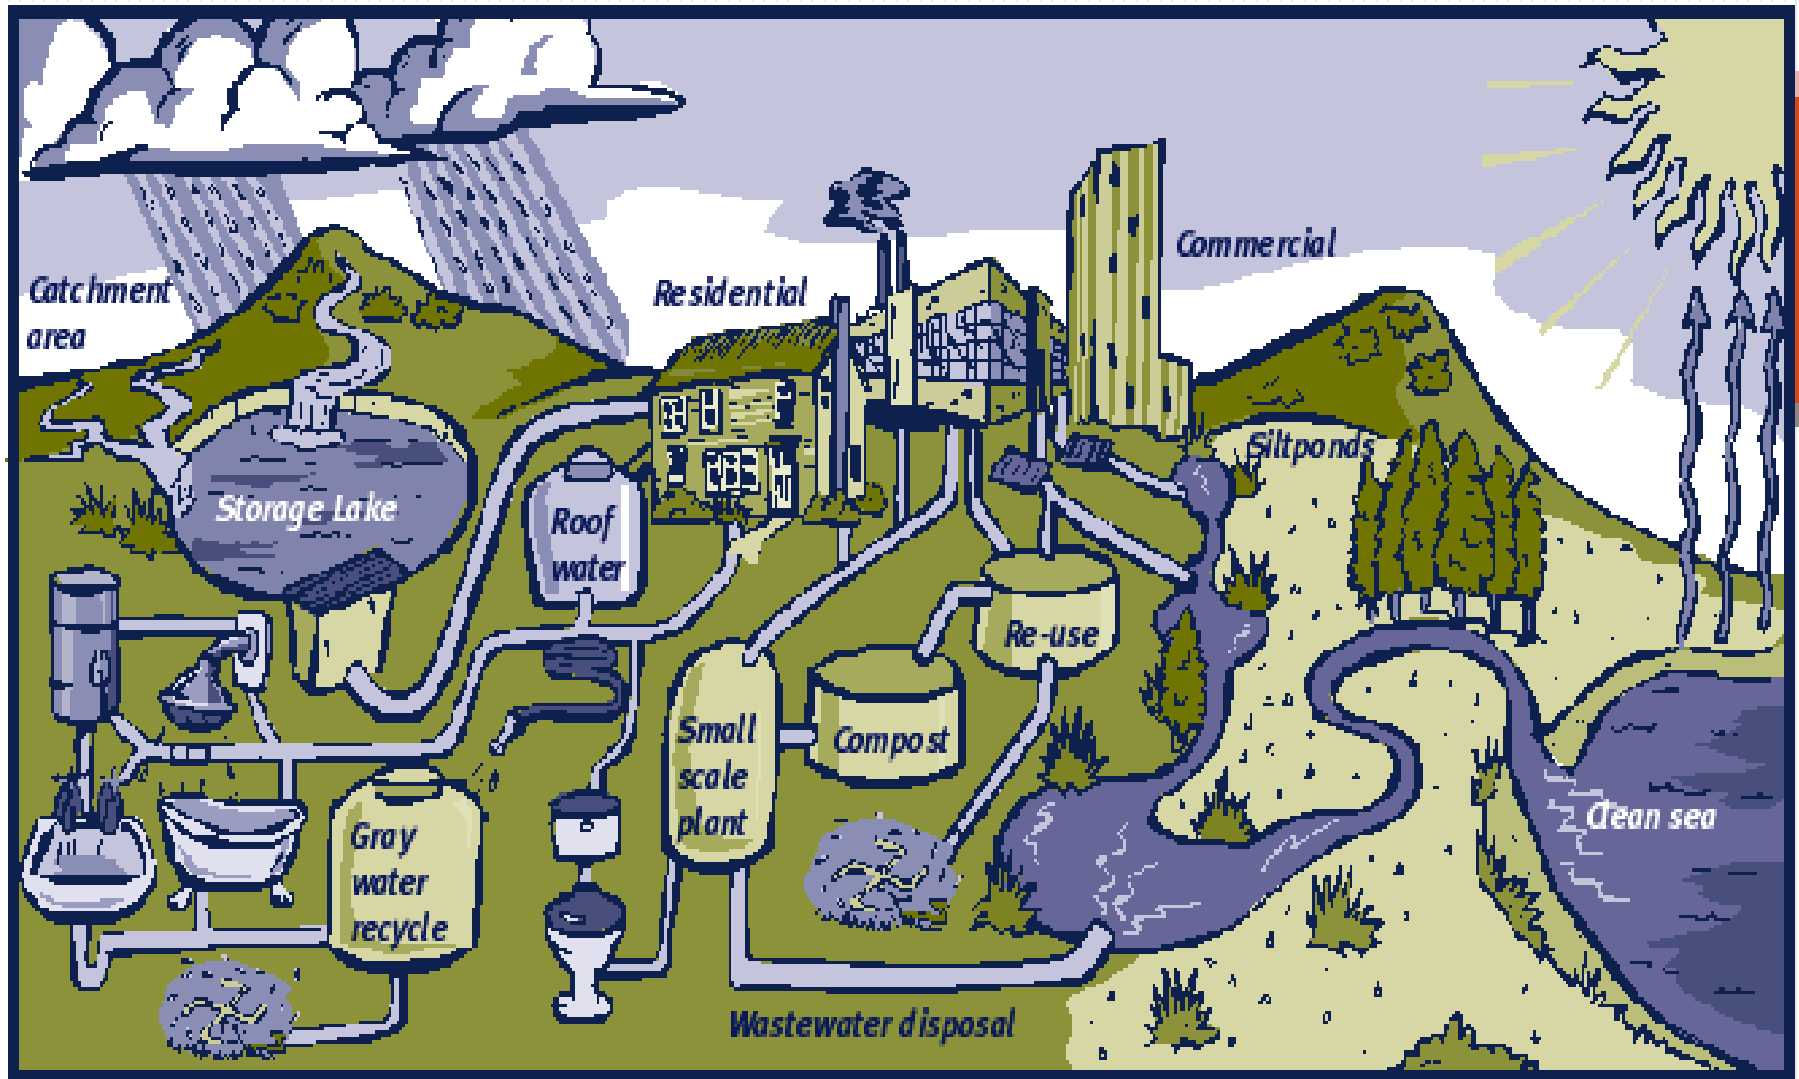

Where can we disrupt the transmission routes?

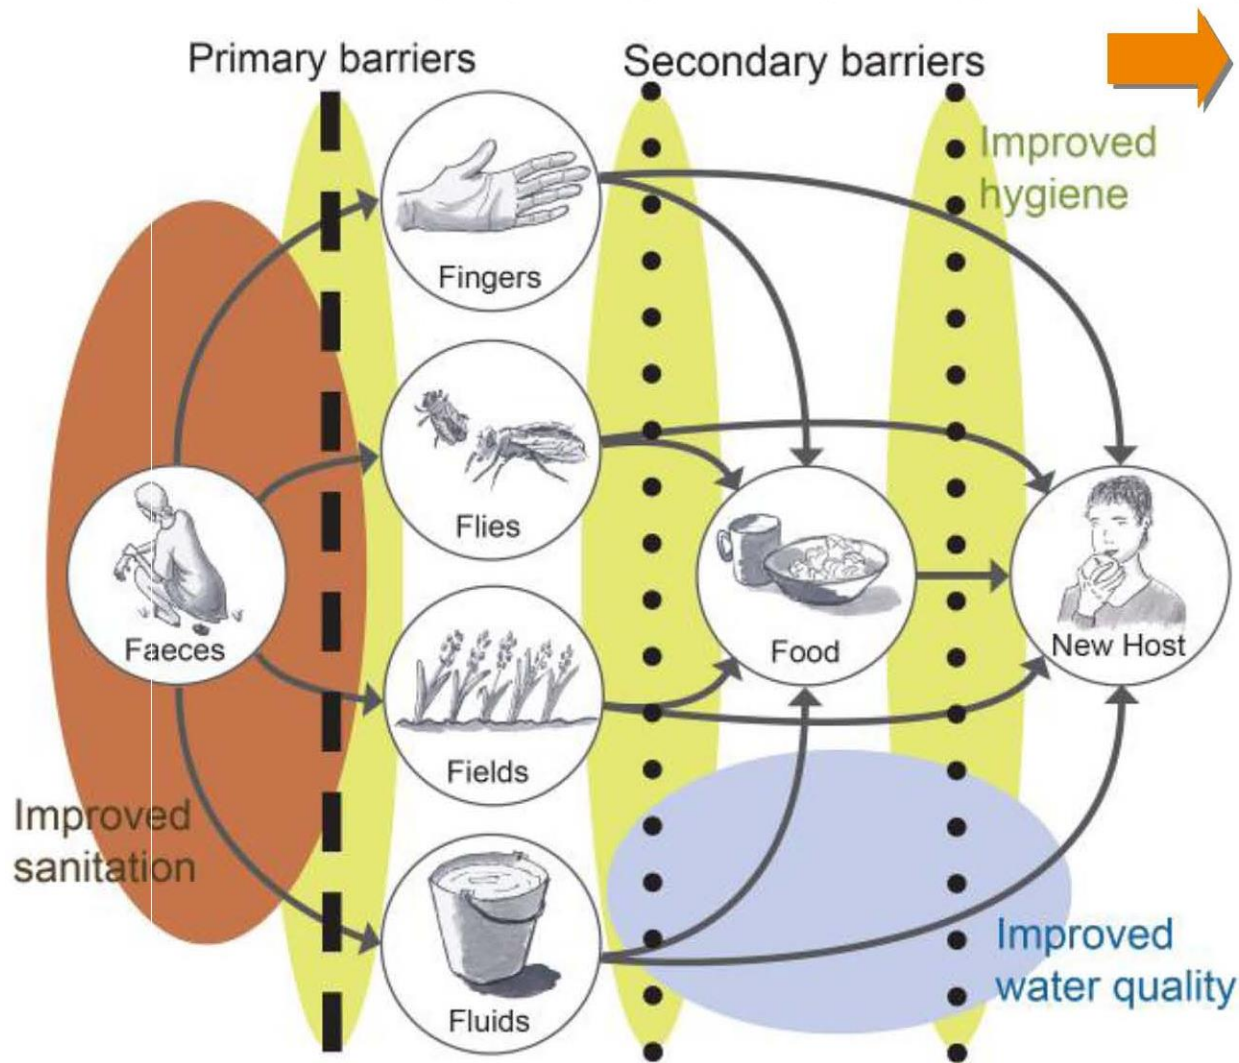

Washing hands after defecation or constructing safe sanitation facilities are **primary barriers** which prevent pathogens from entering the environment.

Washing hands before eating or protecting food from flies are **secondary barriers** which prevent pathogens from infecting a new host or contaminating food.

adapted from WHO 2005

Water related diseases

I. Water-borne

Pathogens carried by water

Faecal-oral transmission

- Cholera
- Typhoid
- Shigellosis

Water transmitted infectious disease

II. Water-washed

(Water- scarce)
water quantity problem

- Dengue
- Malaria
- Japanese Encephalitis
- Rift Valley Fever
- West Nile Virus

III. Water-based

Pathogen dependent on water animal/plant

- Schistosomiasis (Urinary and rectal schistosomiasis)
- Fascioliasis

IV. Water related

Pathogen transmitted close/near water
Mosquito-borne

SANITATION SAFETY PLANNING


MANUAL FOR SAFE USE AND
DISPOSAL OF WASTEWATER,
GREYWATER AND EXCRETA



Compendium of Sanitation Systems and Technologies

2nd
revised
edition

Sanitation System Drawing Tool
Version 1 (July 2015)

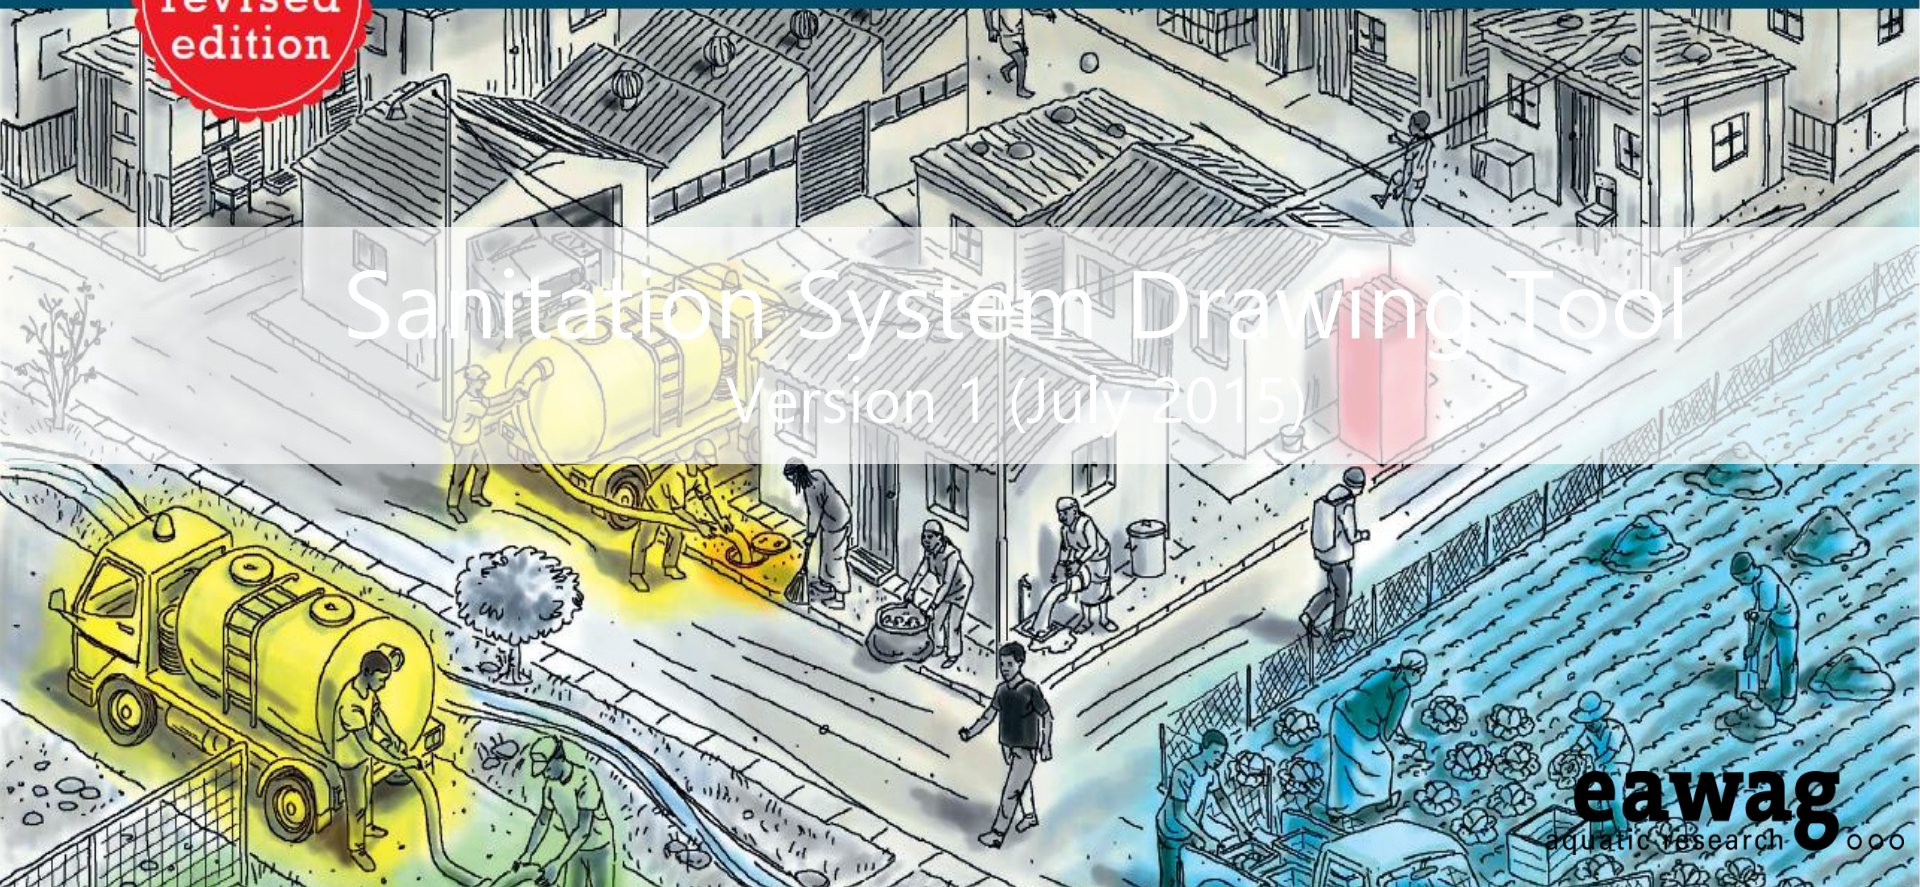

SANITATION SAFETY PLAN - 6 MODULES

- 1. PREPARE FOR SANITATION SAFETY PLAN**
- 2. DESCRIBE THE SANITATION SYSTEM**
- 3. IDENTIFY HAZARDOUS EVENTS, ASSESS EXISTING CONTROL MEASURES & EXPOSURE RISKS**
- 4. DEVELOP AND IMPLEMENT AN INCREMENTAL IMPROVEMENT PLAN**
- 5. MONITOR CONTROL MEASURES & VERIFY PERFORMANCE**
- 6. DEVELOP SUPPORTING PROGRAMME & REVIEW PLANS**

SOURCE: WHO

MODULE 1

PREPARE FOR SSP

MODULES

- 1.1 Establish priority areas or activities**
- 1.2 Set objectives**
- 1.3 Define the system boundary and lead organization**
- 1.4 Assemble the team**

OUTPUTS

- Agreed priority areas, purpose, scope, boundaries and leadership for SSP**
- A multidisciplinary team representing the sanitation chain for development and implementation of SSP**

MODULE 2

DESCRIBE THE SANITATION SYSTEM

MODULES

- 2.1 Map the system**
- 2.2 Characterize the waste fractions**
- 2.3 Identify potential exposure groups**
- 2.4 Gather compliance and contextual information**
- 2.5 Validate the system description**

OUTPUTS

- **A validated map and description of the system**
- **Potential exposure groups**
- **An understanding of the waste stream constituents and waste related health hazards**
- **An understanding of the factors affecting the performance and vulnerability of the system**
- **A compilation of all other relevant technical, legal and regulatory information**

MODULE 3

IDENTIFY HAZARDOUS EVENTS, ASSESS EXISTING CONTROL MEASURES AND EXPOSURE RISKS

MODULES

- 3.1 Identify hazards and hazardous events**
- 3.2 Refine exposure groups and exposure routes**
- 3.3 Identify and assess existing control measures**
- 3.4 Assess and prioritize the exposure risk**

OUTPUTS

- A risk assessment table which includes a comprehensive list of hazards, and summarizes hazardous events, exposure groups and routes, existing control measures and their effectiveness**
- A prioritized list of hazardous events to guide system improvements**

MODULE 4

DEVELOP AND IMPLEMENT AN INCREMENTAL IMPROVEMENT PLAN

MODULES

- 4.1 Consider options to control identified risks**
- 4.2 Use selected options to develop an incremental improvement plan**
- 4.3 Implement the improvement plan**

OUTPUTS

- An implemented plan with incremental improvements which protects all exposure groups along the sanitation chain**

MODULE 5 |

MONITOR CONTROL MEASURES AND VERIFY PERFORMANCE

MODULES

5.1 Define and implement operational monitoring

5.2 Verify system performance

5.3 Audit the system

OUTPUTS

- **An operational monitoring plan**
- **A verification monitoring plan**
- **Independent assessment**

MODULE 6

DEVELOP SUPPORTING PROGRAMMES AND REVIEW PLANS

MODULES

- 6.1 identify and implement supporting programmes and management procedures**
- 6.2 Periodically review and update the SSP outputs**

OUTPUTS

- Supporting programmes and management procedures that improve implementation of the SSP outputs**
- Up to date SSP outputs responding to internal and external changes**

Ammonia & Nitrate Pollution


- Nitrogen Cycle & pollution



$$1 \text{ mg NH}_4 = 3.6 \text{ mg O}_2$$

$$1 \text{ mg NH}_4^+ = 3.44 \text{ mg NO}_3^-$$

- Iron & Manganese Removal




$$1 \text{ mg Fe}^{2+} = 0.14 \text{ mg O}_2$$

- $6 \text{Mn}^{2+} + 3 \text{O}_2 + 6 \text{H}_2\text{O} = 6 \text{MnO}_2 + 12 \text{H}^+$

$$1 \text{ mg Mn}^{2+} = 0.29 \text{ mg O}_2$$




PRIMARY - SEPTIC TANK

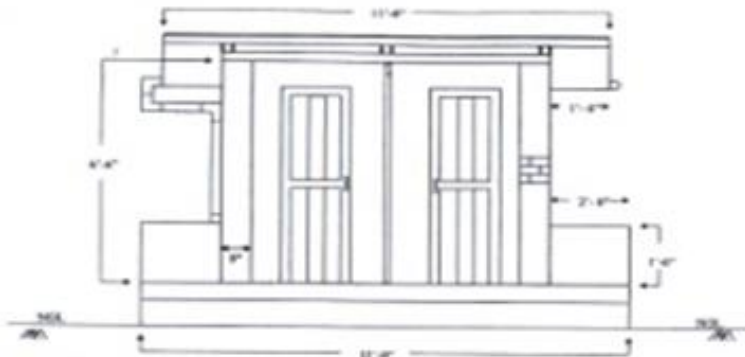


Front Elevation

Isometric View

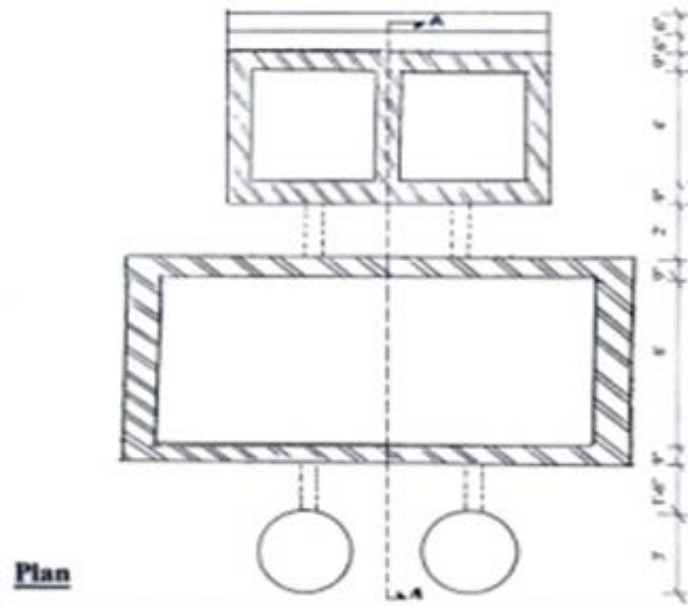


Plan

Section A - A

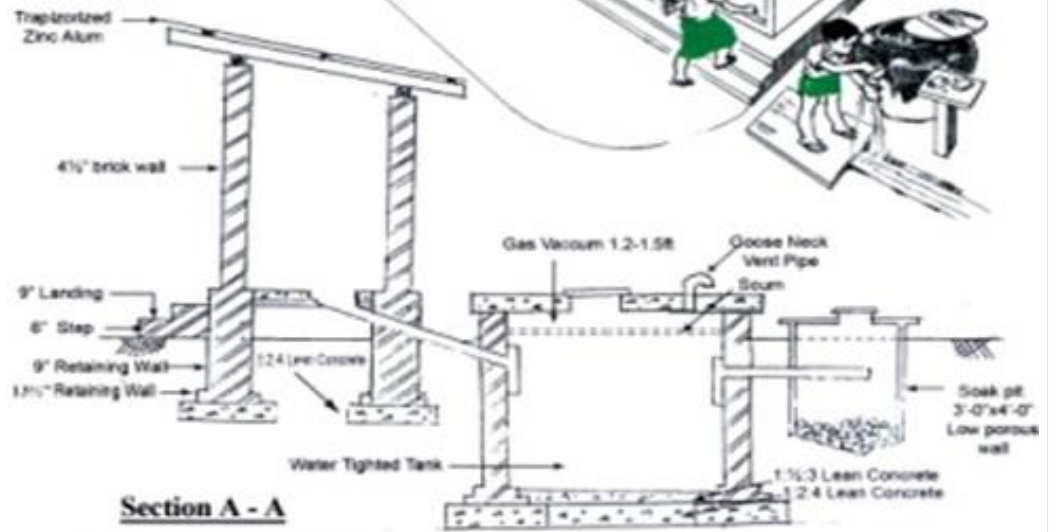


CDD- Consortium DEWATS Disemination

Decentralized Wastewater Treatment System

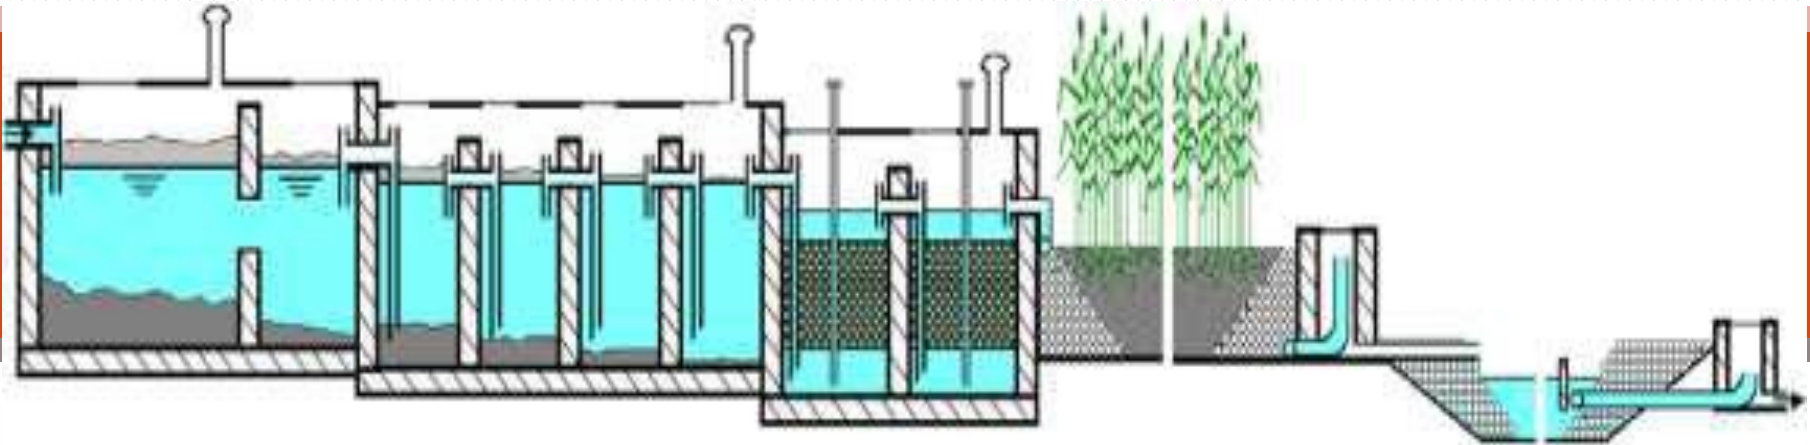

Settler – ABR – AF – PGF – polishing pond (not true to scale)

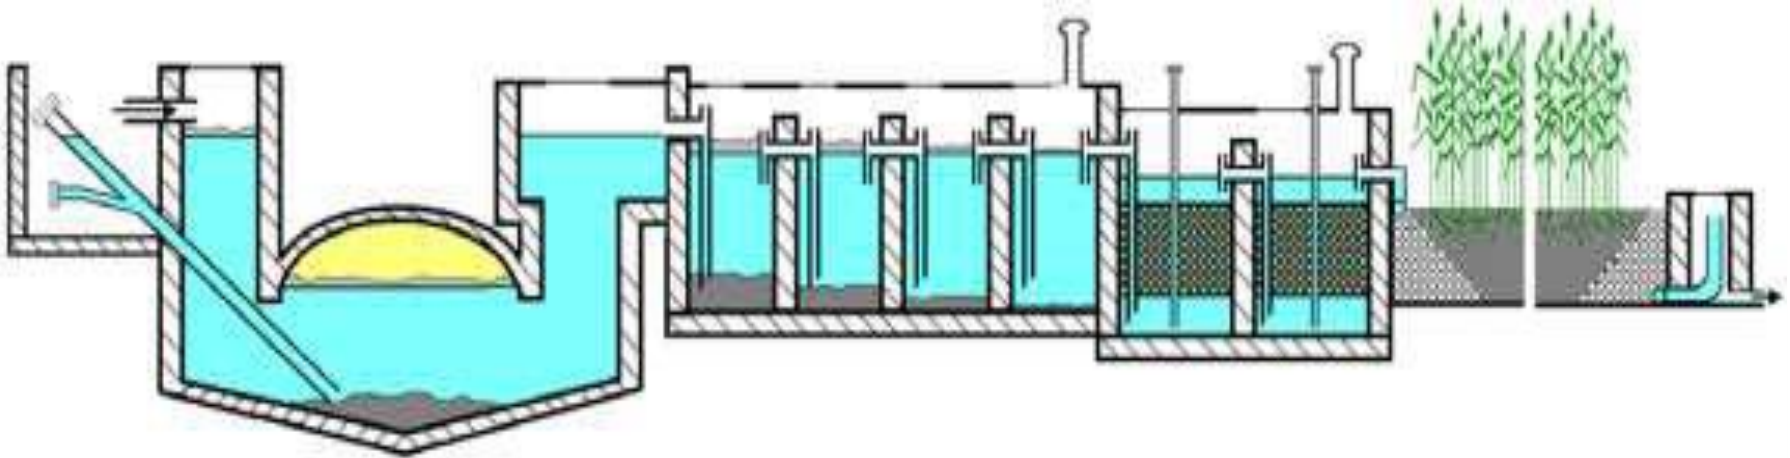

fixed dome biogas settler – ABR – AF – PGF (not true to scale)

Thumb Rules (Settler)

1. Sludge volume l/g BODrem=0.005 BODr
2. SS/COD = 0.35 - 0.55 - 0.42
3. Surface load =0.6 m³/m² w/w peak flow
4. CH₄ produced /kg COD rem=0.35 m³/kg
5. Height(scum) = 0.2 - 0.3 m
6. Hydraulic RT = 1.5 - 2.0 hrs
- 7. L/B ratio = 2.1 - 3.1**
- 8. Outlet Liq depth=1.8- 2.2 m**
9. 1st & 2nd Chamber ratio
If 2 Chams, 1st Cham = 2/3 of total length
If 3 Chams, 1st Cham = 1/2 total length.
11. Assure wall opening bet. under scum & sludge top, have MH, Water tight, Vent
12. Desludg interval = 18- 24 m

Thumb Rules (ABR)

1. SS/COD-Dom. =.35-.55-.42
2. Sludge Volume - 5-10% of volume of ABR
3. CH₄-produced /KgCODrem - 0.35 m³/kg
4. Scum volume 10 l/cap
5. HRT- not <8 hrs, better 16-20 hrs, if > 20 hrs, pollution removal is very minimum
- 6. B/H ratio - 0.4**
7. Distance bet: pipes - not exceed 0.30 m
8. Nos of Chambers - At least 4 chambers
- 9. Outlet water depth- 1.8 m- 2.2 m**
10. Up-flow vel: - 0.9 - 1.2 m/h
11. Organic load - < 6 kg/m³* day BOD

Thumb Rules (AF)

1. SS/COD - Domestic: 0.35-0.45-0.42
2. HRT - 24-48 hrs
3. Filter height - 0,75 - 1 m
4. Specific surface of filter medium 80 -120 m²/ m³
5. Voids in the filter mass 30-45%
6. Size of filter 8-14 cm dia,cinder
7. Up-flow velocity Max 2m/h
8. Organic load <4 kg/m³ *day COD
- 9. Outlet water depth - 1.8- 2.2 m**
10. CH₄-produced /Kg CODrem - - 0.35 m³/kg

Thumb Rules (HPGF)

1. Void of gravel - 35%- 45%
2. Max BOD on X sectional area- 150 g/m³ s
3. Max organic on chosen surface (Organic load limit) - 10 g//m² BOD
4. Gravel size- 5-7mm, 10- 12 mm, 50-70mm dia., bigger size at inlet & outlet
5. Slope 1%
6. Height of filter 50 - 60 cm
7. Construction - Swivel at inlet & outlet to adjust water level

No Thumb Rules

(Polishing Pond)

$$V = 12 \text{ m}^3/d * 2d = 24 \text{ m}^3$$

$$\text{Sur. Area} = .24 \text{ m}^3 / 1 \text{ m} = 24 \text{ m}^2$$

Dimensions:

$$W = 4 \text{ m}, L = 6 \text{ m}$$

$$\text{Diameter } 5.5 \text{ m}$$


CDD- Consortium DEWATS Dissemination



Reutilizing Wastewater for Plants



PRIMARY - IMHOFF TANK

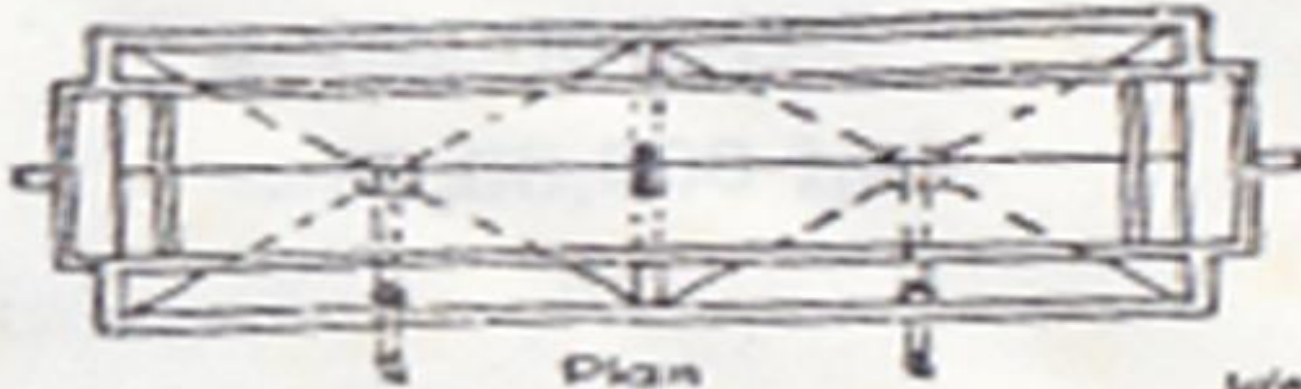

Water line


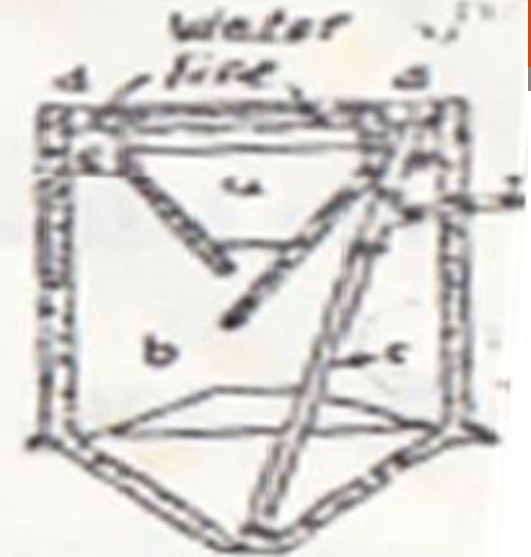





FIG. G.8. IMHOFF TANK

SECONDARY - TRICKLING FILTER

10

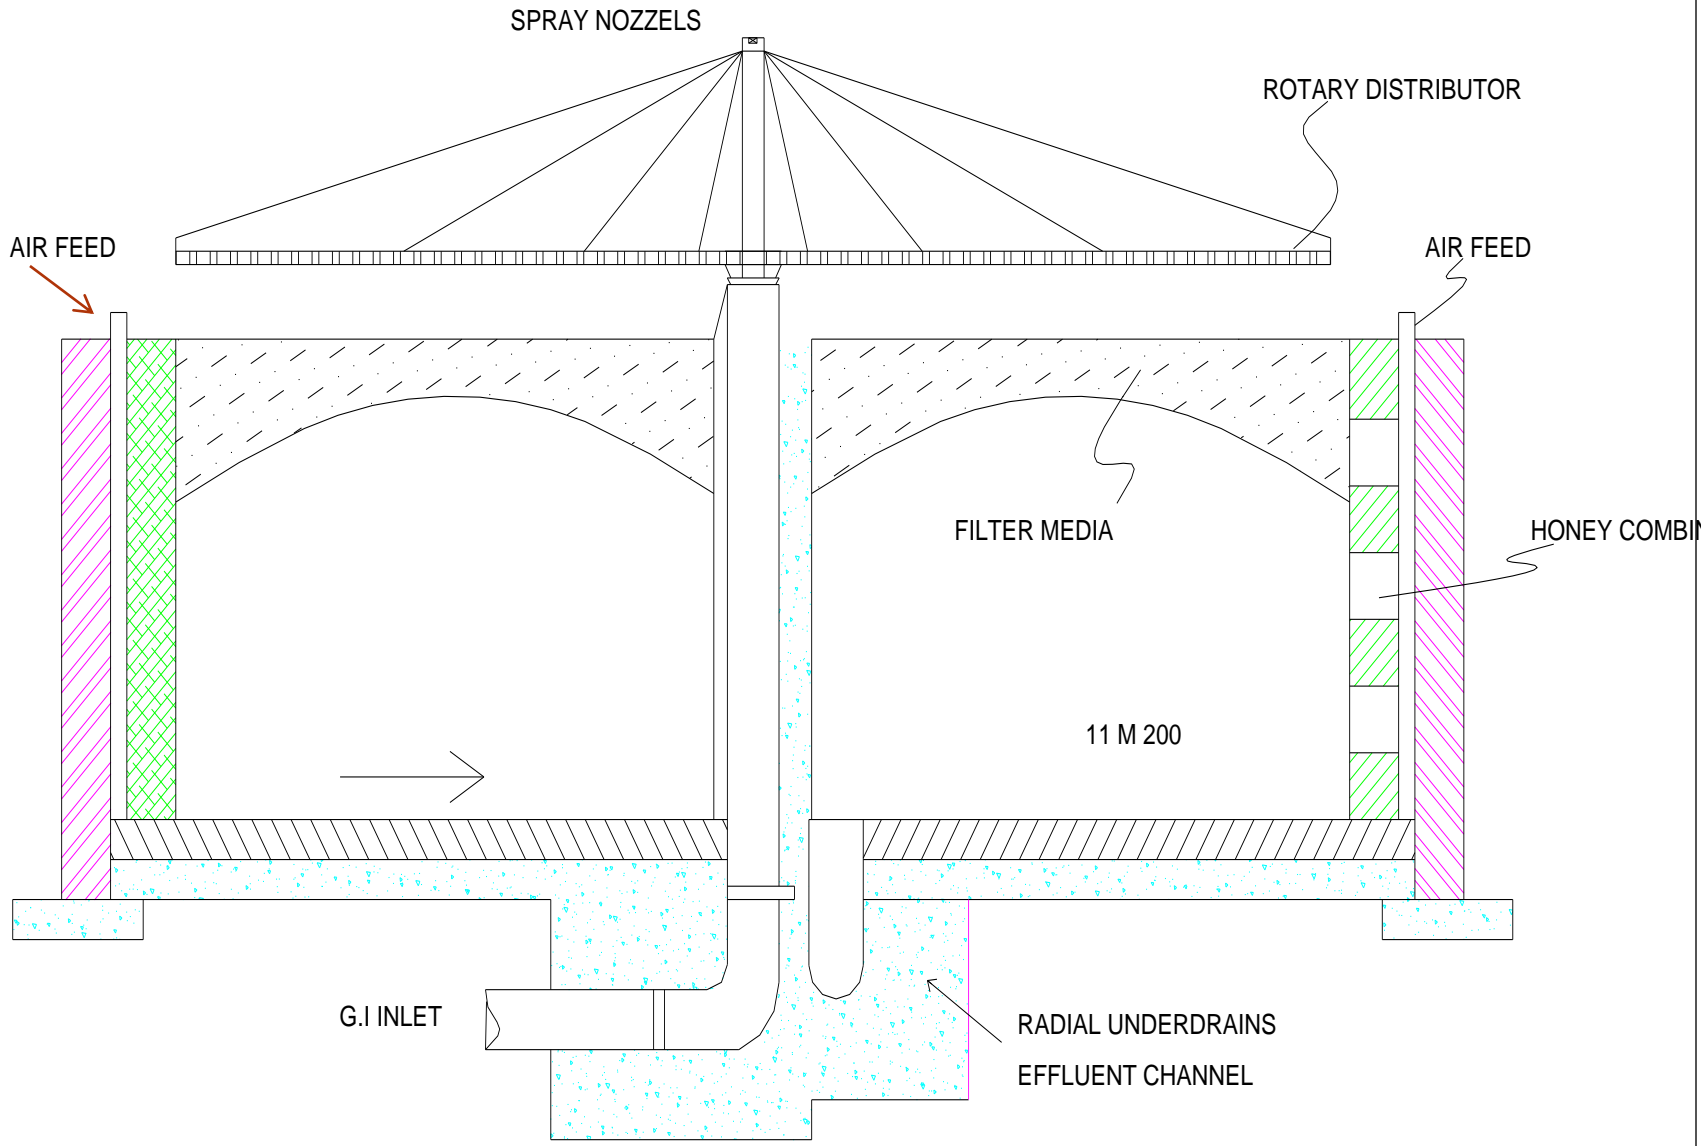

SECONDARY - ACTIVATED SLUDGE or SBR

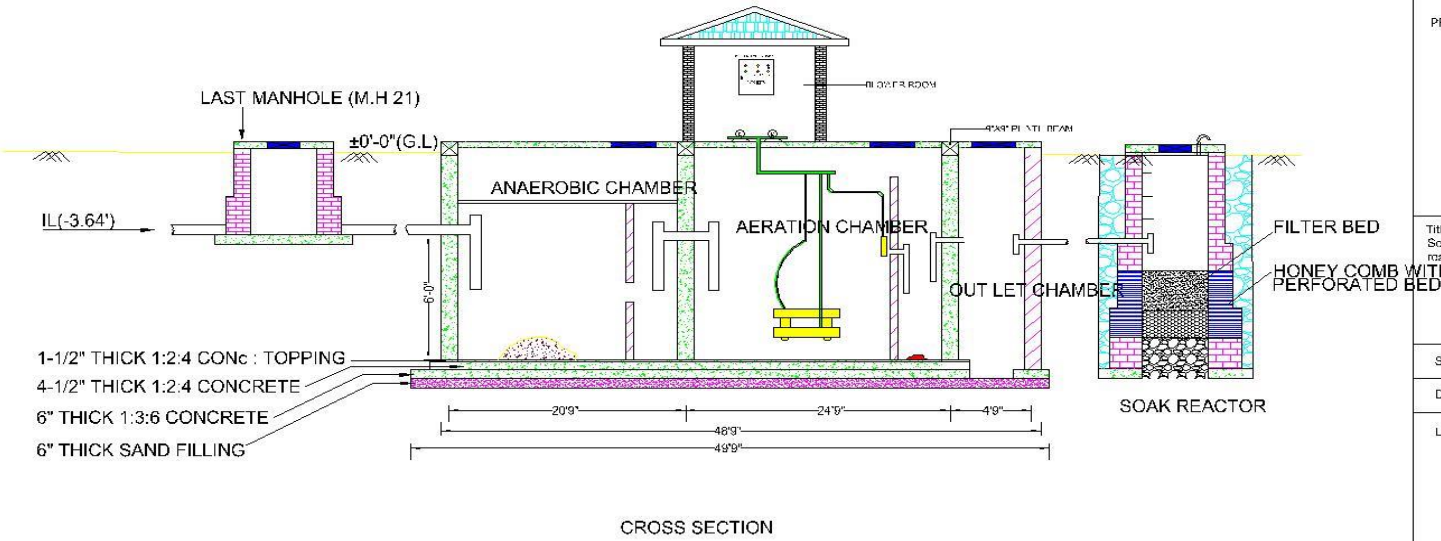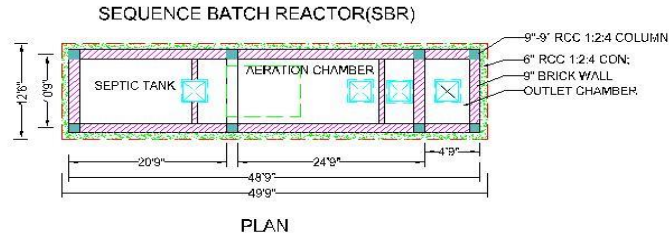

SBR STANDARDS & SPECIFICATIONS

- (1) Small area needed
 - (2) Detention Time - 2.2 days
 - (3) Cleaning Interval 1 Year
 - (4) Aeration Time 8-12 hours
 - (5) Blower Capacity 2 H-P (5 to 7 Cubicmetre/second) (Ground Fos)
- Effluent Quality**
- > 90% Removal of B.O.D (less than 30 mg/litres) & Total Solid
 - > Free from odour & fly nuisance
 - > Free from odour & fly nuisance


OWNER (APPLICANT) REQUIREMENTS

- (1) Toilet super structure to be completed ahead - Owner
- (2) Influent Installation - Owner
- (3) Treated Storage Tank - Owner
- (4) Final effluent disposal - Owner


PROJECT	SPECIAL DEVELOPMENT PROJECT	
	Block No	
	Log No	
	Township	
Title Sequence batch reactor & manhole	SUBJECT; PLAN VIEW CROSS SECTIONAL VIEW	
SCALE	1" = 8'-0"	Sheet No.
DATE	14/11/2011	
L/S		

Module 2.1 Map the system

An initial engineering diagram was used to aid in understanding the system

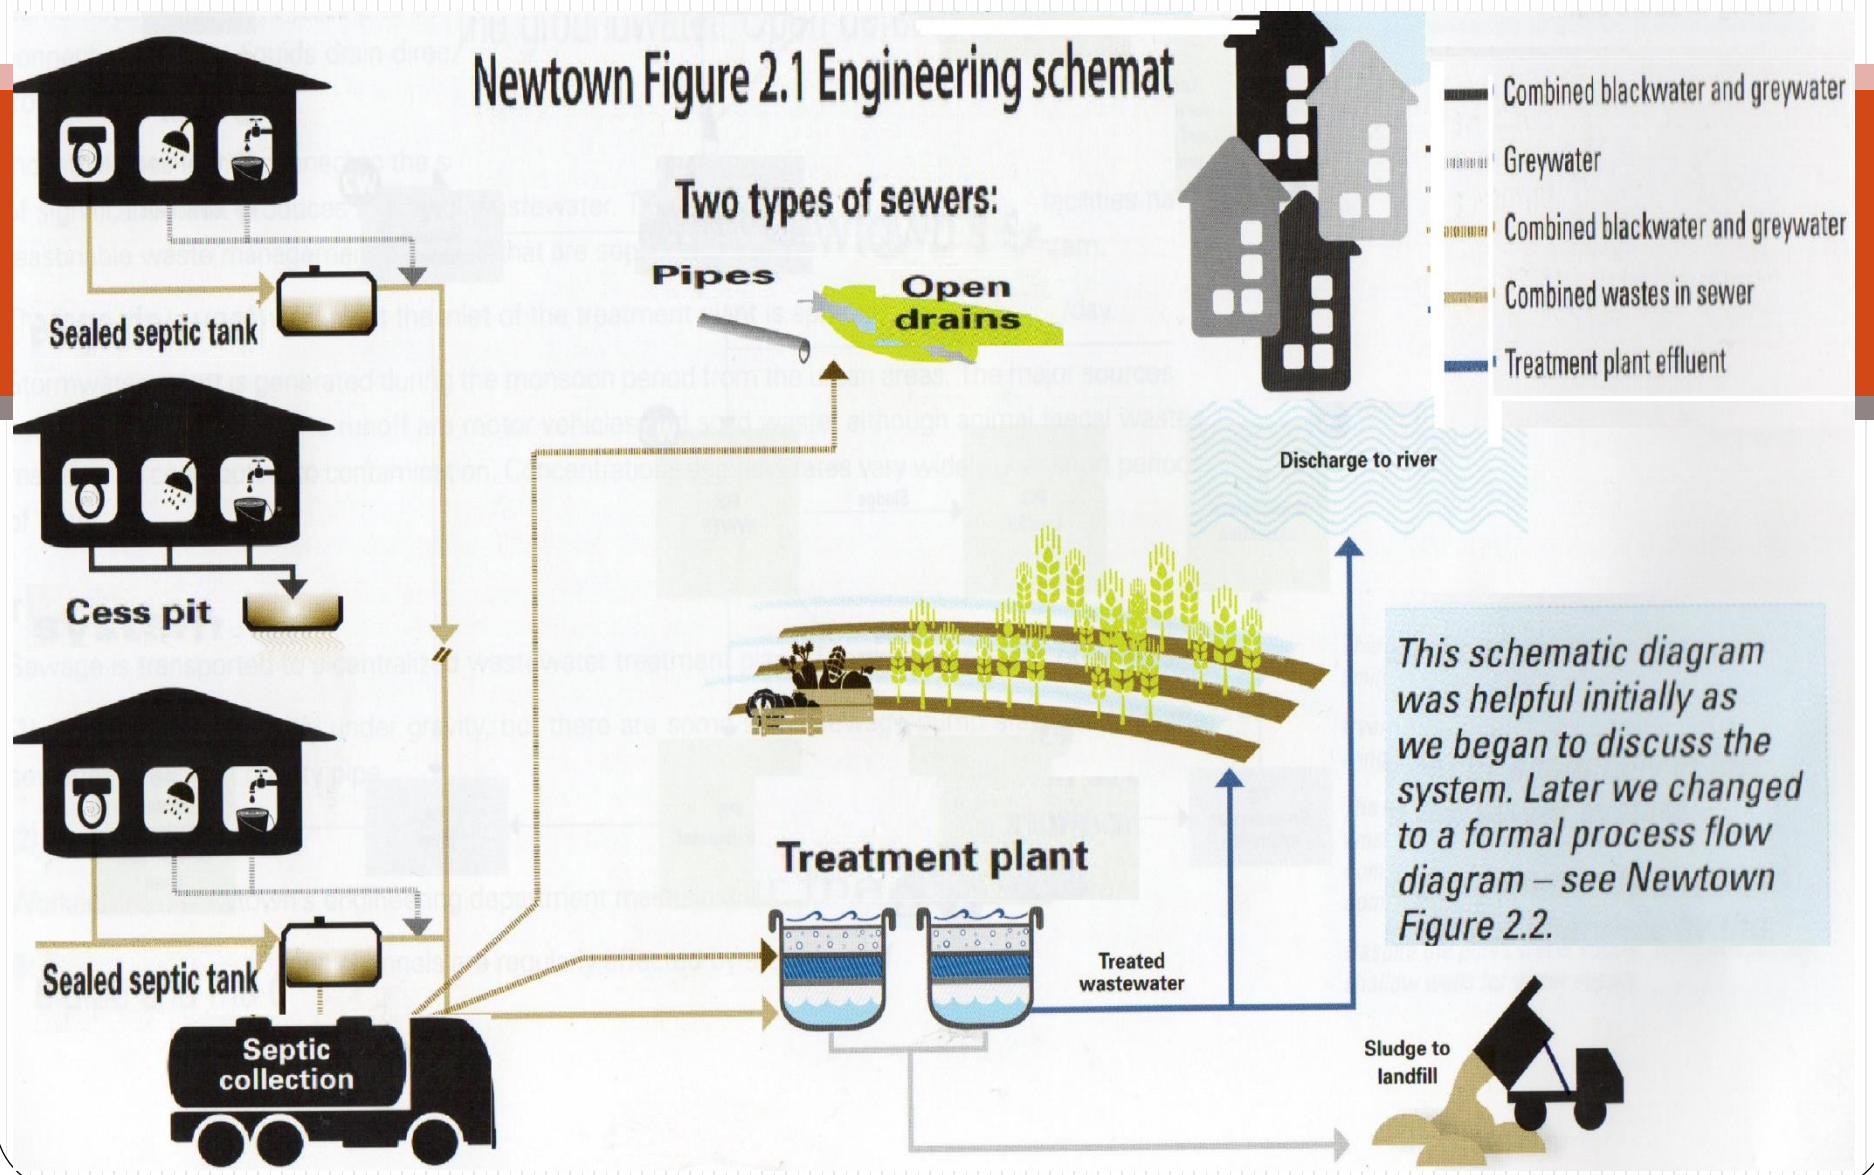

Newtown Fig 2.2 Process Flow Diagram

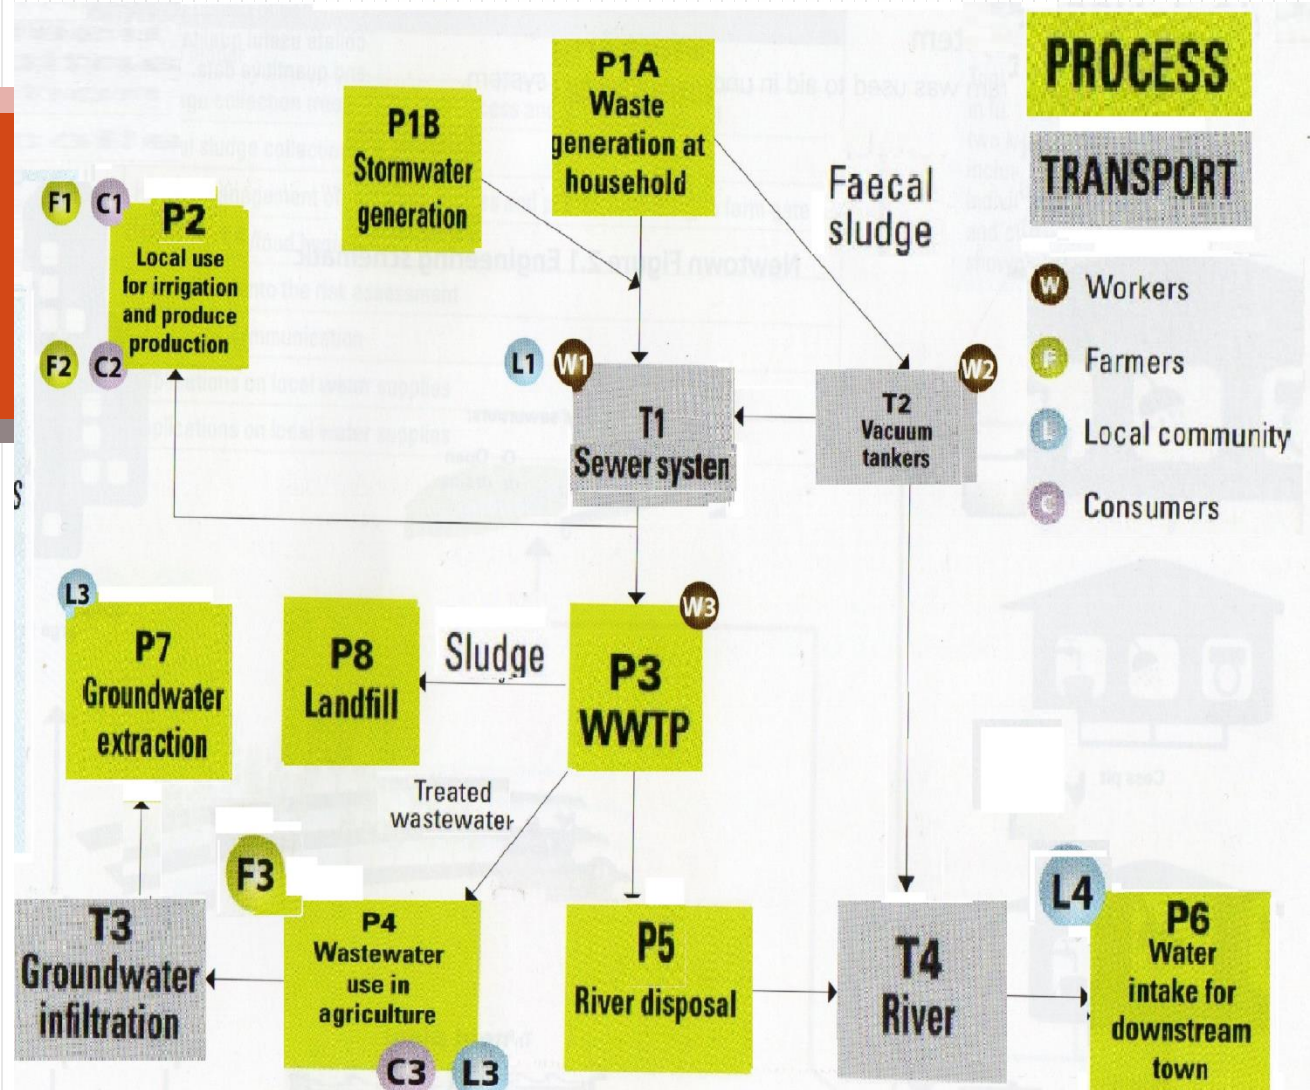

This is the process F.D adopted during Module 2.1

The process and Transport nos (P1, P2, T1, T2 etc) helped as system information.

Nytrogen Cycle & Effects

- $\text{NH}_4^+ + 2\text{O}_2 = \text{NO}_3^- + 2\text{H}^+ + \text{H}_2\text{O}$
- $1 \text{ mg NH}_4^+ = 3.6 \text{ mg O}_2$
- $1 \text{ mg NH}_4^+ = 3.44 \text{ mg NO}_3^-$



In Water Quality

If NO_3^- is $> 50 \text{ mg/l}$ → Cause Blue Baby disease


Denitrification

12.1 Basic Technology of Denitrification

- *Nitrification*



- *Denitrification*




- In this reaction 4.6 kg of oxygen are consumed to oxidize 1 kg of $\text{NH}_3\text{-N}$, and the oxidation of ammonia *reduces the alkalinity in the water*. As the nitrification bacteria are sensitive to temperature and pH, the pH control and temperature range maintenance shall be performed carefully to effectively promote the reaction.

Waste Collection



Waste-to-Energy

Landfill Gas to Energy

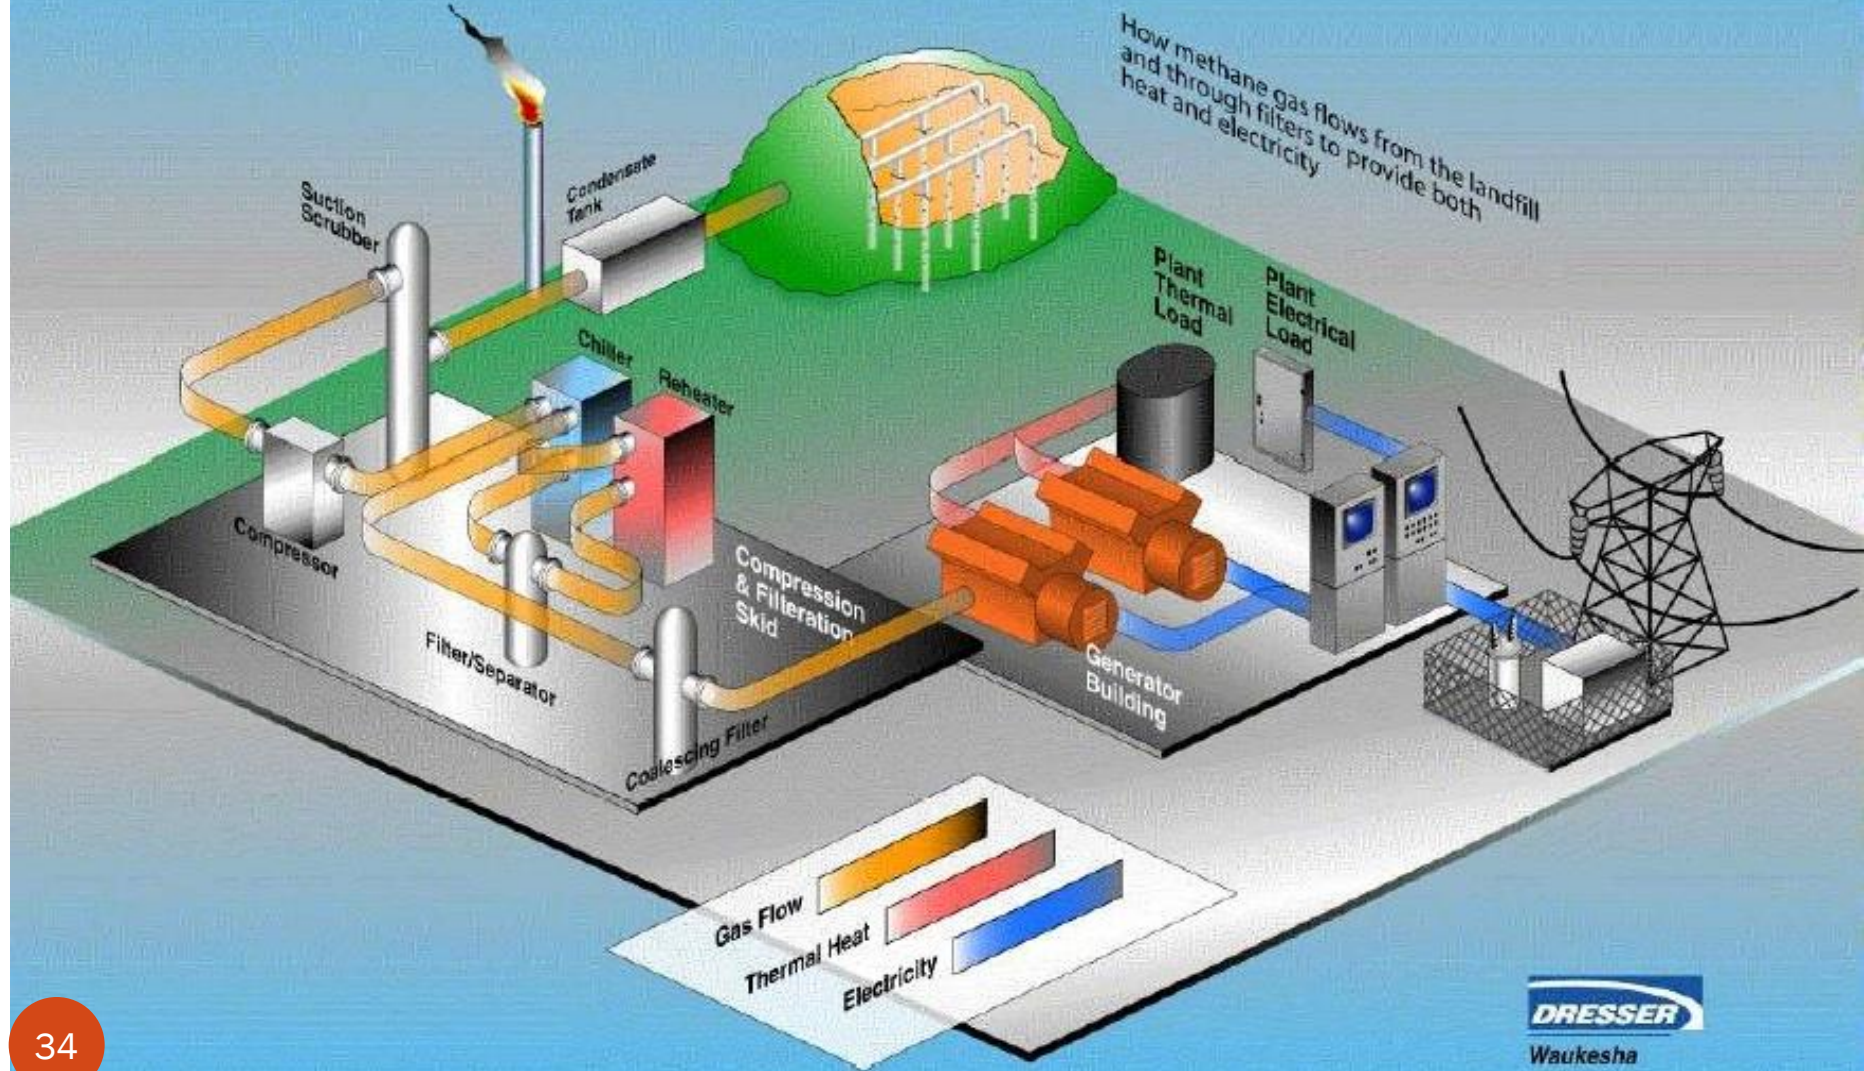

Waste Reduction & Recycle



R
C

Waste Composting

The Composting Process



Solid Waste Management Needed!



ISSN 1656-8818

Policy Brief Series 2006 - 1

Solid Waste Management Badly Needed in Myanmar¹

Asia's urbanized areas produce about 760,000 tons of solid waste daily, and are expected to be more than double by year 2025. And that is not even the worse case scenario.

According to the World Bank, municipalities in developing countries spend 20-50% of their budget on solid waste management. Sadly though, 30-60% of urban solid wastes in Asian countries remain uncollected and less than 50% of the population served. In some cases, as much as 80% of the trash

collection and transport equipment is non-functional.

Despite the palpable urgency to solve this issue, local governments in third world countries are stumped in the achievement of an effective solid waste management system (SWMS) in urban areas for several factors. These factors include lack of funds and resources, community involvement, collective and participatory planning, technical know-how of staff, discipline on the part of waste producers, and updated policies.

A Microcosm of the Waste Management Concern

Yangon City, the capital of the Union of Myanmar, exemplifies an alarming neglect of this waste management issue. Currently, the City has a population of 5.5 million with an annual growth rate of about 2%. More people mean more waste. Rapid urbanization and population growth render the City's human health and environment vulnerable to the effects of inefficient waste management system.

Seinn Lei Aye, in her dissertation titled "Strategic Solid Waste Management Planning for Yangon City, Myanmar", defined solid waste management (SWM) as the "generation, storage, collection, transfer, and transport, processing, and disposal" of solid waste, according to social and economic needs and environmental standards.

In the case of Yangon City, the municipal area generates approximately 2,900 tons of solid waste daily, with a daily collection efficiency of 54%. The average waste generation of public sector is about 0.53 kilogram per capita per day.

Yangon City's SWMS is "centrally implemented, labor-intensive, and uncontrolled." The Pollution Control and Cleansing Department (POCD), under the Yangon City Development Committee (YCDC), administers and performs the municipal SWMS. The 33 Townships in the City are classified into 4 Districts - North, South, East and West. POCD maintains offices in each township, and each township also executes waste collection, street sweeping, and transportation practices.

The current system, however, proves inadequate. This lack of an adequate SWMS in terms of planning, legislation, capacity building, and low level of awareness on environmental management, obsolete equipment, and insufficient budget, among other limitations, is quite alarming.

High Cost. In the 2003-2004 Financial Year, the Yangon City SWMS incurred a total expense of 1.2 million US dollars to collect a total waste volume of

245,098 tons. Meanwhile, the system recovered a mere total of 0.98 million US dollars.

Lack of Technical Know-how. Aside from the high cost of the overall SWMS, waste management officials and staff lack the proper know-how on waste management technologies and have not yet fully grasped its social, economical, and ecological implications.

Outdated policies and legislation. For an SWMS to be adequate and effective in a rapidly growing city such as Yangon, there has to be a strategic plan. Unfortunately, legislation on Yangon City's SWM was formulated way back in 1922, and nothing else followed ever since. This legislation is contained in Sections 111 and 112 of the City of Yangon Municipal Act of 1922 entitled "Scavenging and Cleansing Acts". This empowers YCDC to act on waste management within their jurisdiction and to adopt regulations and standards for the storage, collection, and disposal of solid waste. However, implementing rules and regulations have yet to be put in place, and the existing ones updated.

Policy Recommendations

Based on Aye's study, the SWMP will be rendered effective if supported by policies in the form of legislation, regulations, and administrative orders issued by YCDC and the Mayor. The recommended policies and ordinances that need to be drawn are:

1. An ordinance to support the ecologically sound practices on SWM such as the requirement for

environmental impact assessment (EIA) for the industries and waste segregation programs for residential, commercial, and other establishments;

2. An ordinance to support the collection of waste management charges in the form of direct-user charges (which depend on volume of waste generated) and monthly charges from households, institutions, commercial establishments, and industries;
3. An anti-littering ordinance that penalizes illegal dumping of wastes.

Other recommendations toward an effective SWMS are:

- Active community involvement and participation through appropriate information dissemination and knowledge proliferation on proper SWM;
- Waste minimization;
- Efficient and effective solid waste collection and transportation system; and
- Effective cost recovery program essential in developing waste management practices. (Marie Fjel I. Mananan)

¹ Seinn Lei Aye, Ph.D. *Strategic Solid Waste Management Planning for Yangon City, Myanmar*. University of the Philippines Los Baños (UPLB), December 2005.




Yangon City's SWMS

“centrally implemented, labor-intensive, and uncontrolled.”

- The Pollution Control and Cleansing Department (PCCD), under the Yangon City Development Committee (YCDC), administers and performs the municipal SWMS.
- The 33 Townships in the City are classified into 4 Districts - North, South, East and West.
- PCCD maintains offices in each township, executing waste collection, street sweeping, and transportation practices.
- The current system, however, proves inadequate.
- Lack of an adequate SWMS in terms of
 - planning,
 - legislation,
 - capacity building,
- Low level of awareness on environmental management,
- Obsolete equipment, and insufficient budget,
- Other limitations

Integrated Solid Waste Management

Solid Waste Management

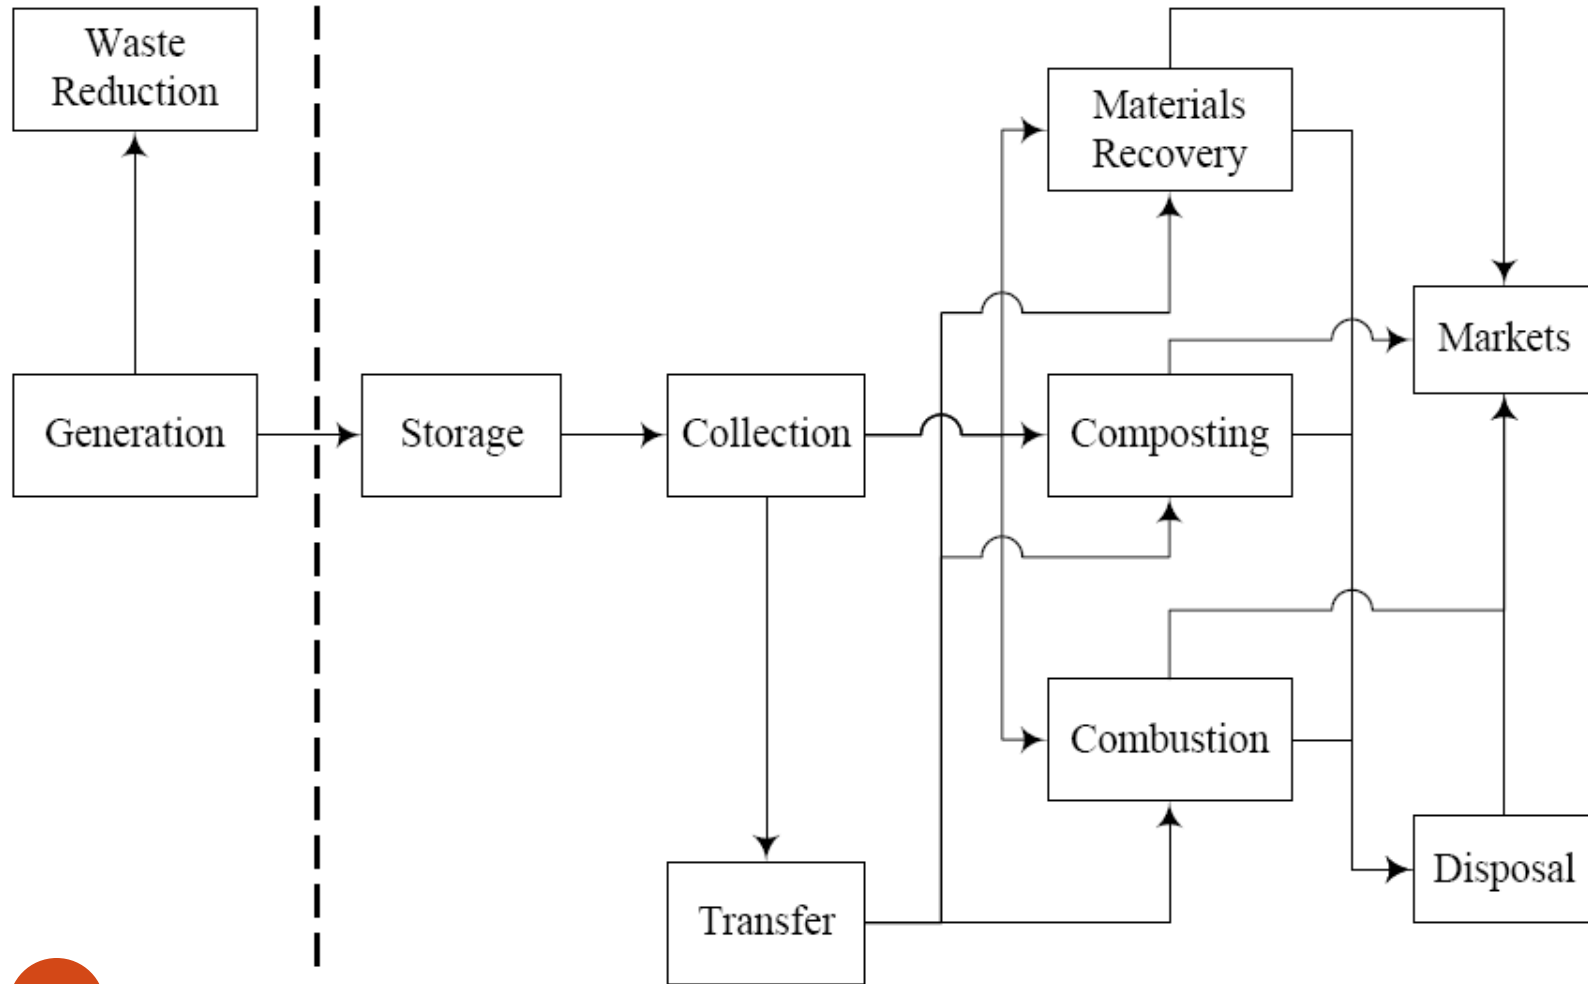

Processing and Disposal of MSW

- *Landfill*
- *Composting*
- *Recycling and recovery*
- *Incineration*

Landfill


- The most preferred method for the final disposal of solid waste.
- Most of these sites practice open dumping.
- Landfill Gas
- Waste-to -Energy

Sanitary Landfill


New York State Dept. of Health, Albany, 1969).




(a)

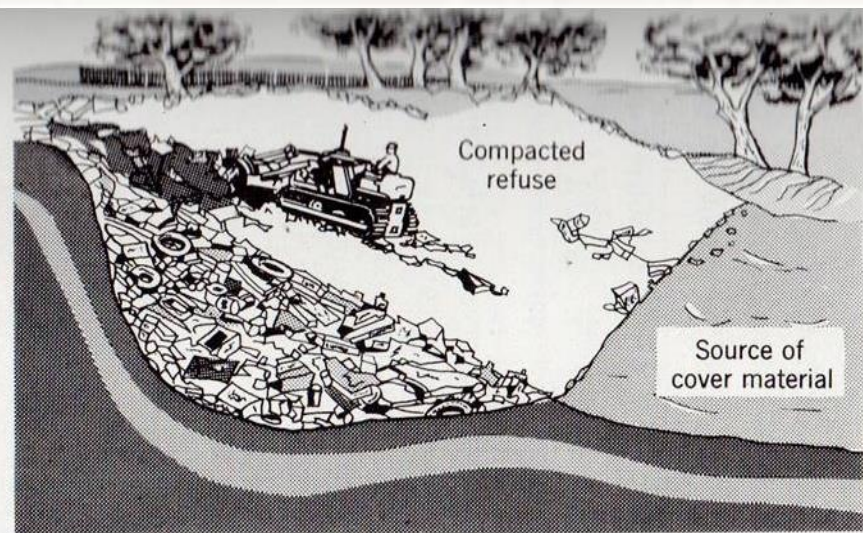

(b)

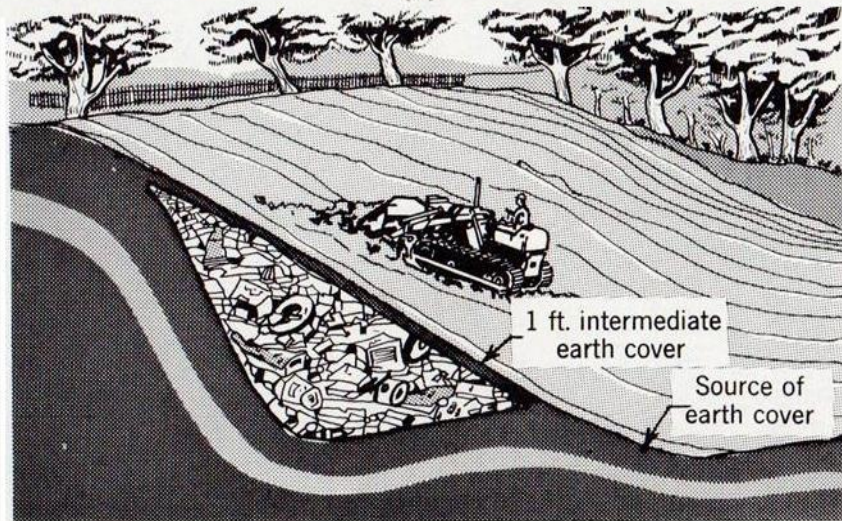

(c)

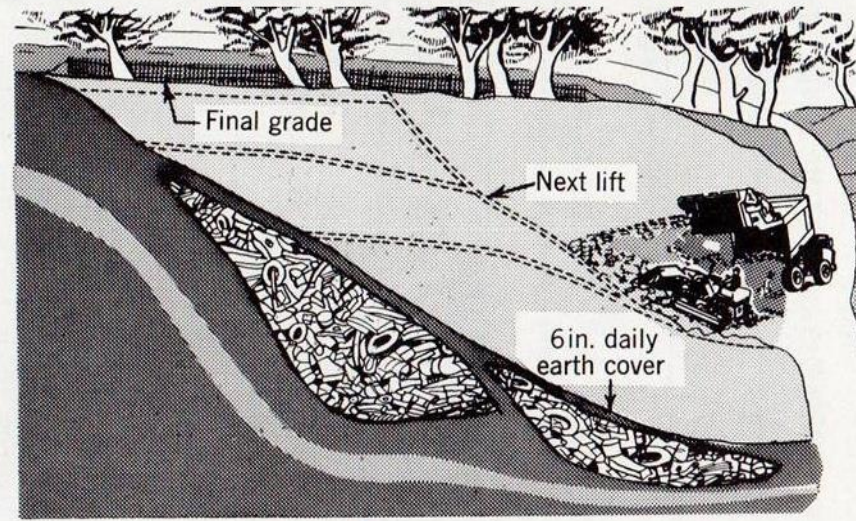

(d)

Figure 5-13 Conversion of an open dump to a sanitary landfill. (a) Existing open dump (b) Steep slope reduced to less than 2:1 to allow safe operation of equipment (c) Refuse compacted and covered (d) Refuse area operated as a sanitary landfill

Composting

- The second preferred method of solid waste disposal,
- Due to the high % of organic materials.
- Compost
- Biofertilizer
- Organic Farming


Recycling and recovery

- Generally carried out by the informal sector.
- Collection of recyclable waste is done in several steps such as
 - door to door collection,
 - collection at secondary and primary transfer stations
 - even in the disposal sites.
- Due to the collection systems
 - the low quality of scrap,
 - the recycling rate is low
 - high number of waste pickers working.




Incineration

- Due to the high capital, operation and maintenance costs involved for the installation of incineration plants,
 - incineration is not popular as a waste disposal system.
- the major portion of the MSW is organic with relatively high moisture content
 - leads to a low calorific value

Integrated Solid Waste Management

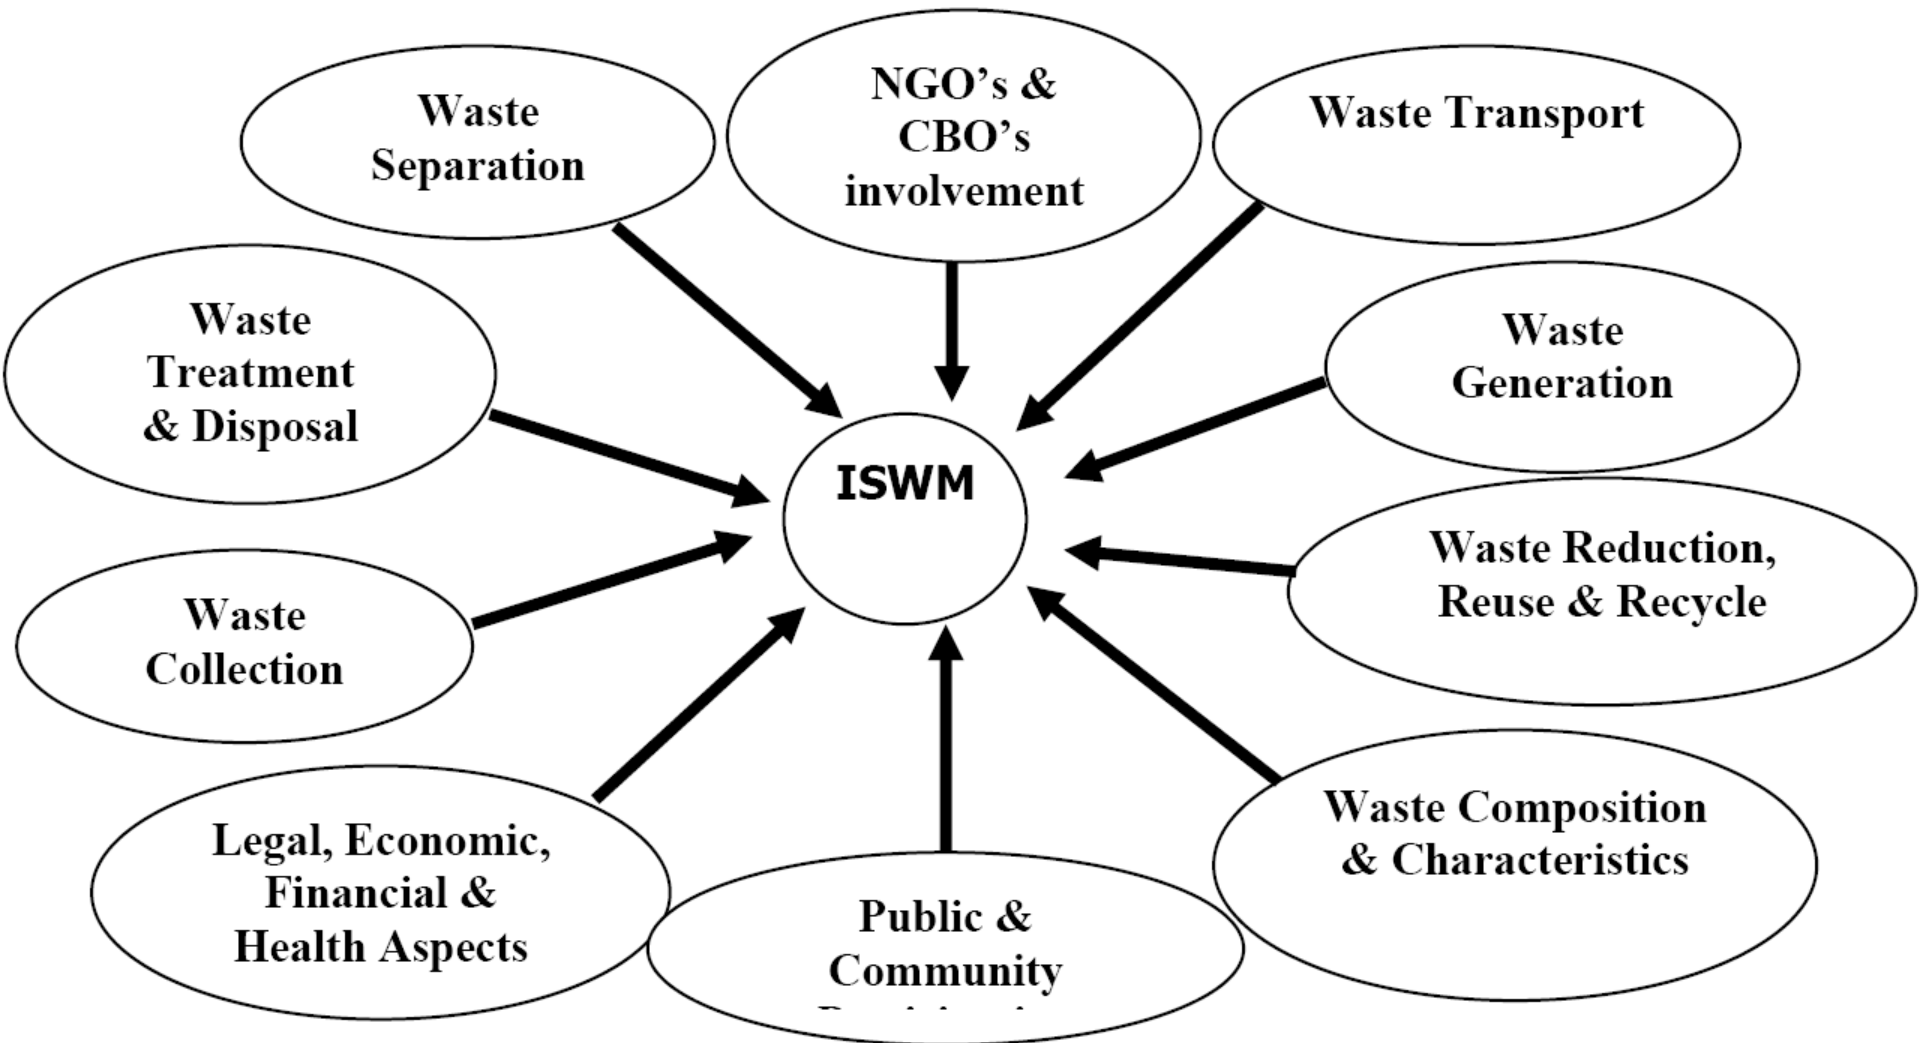

DESALINATION

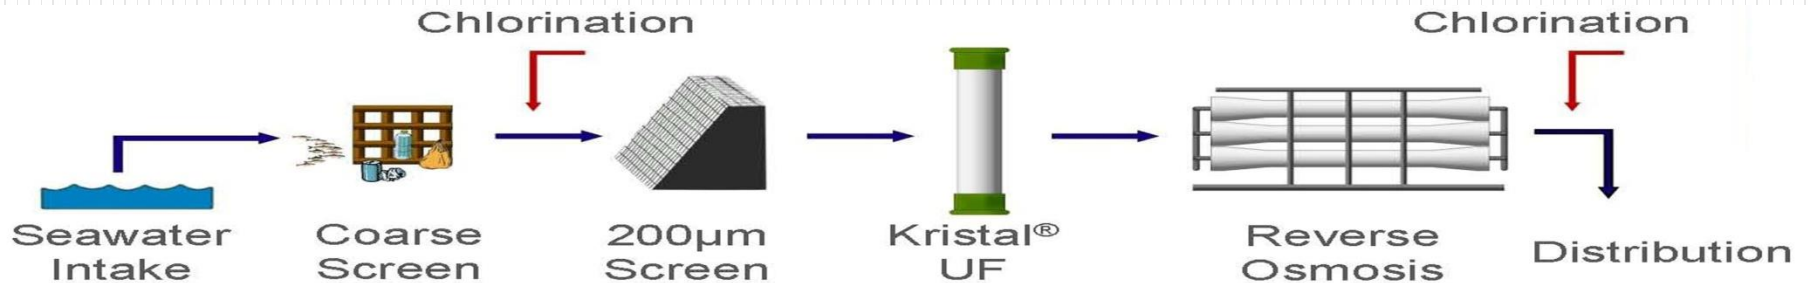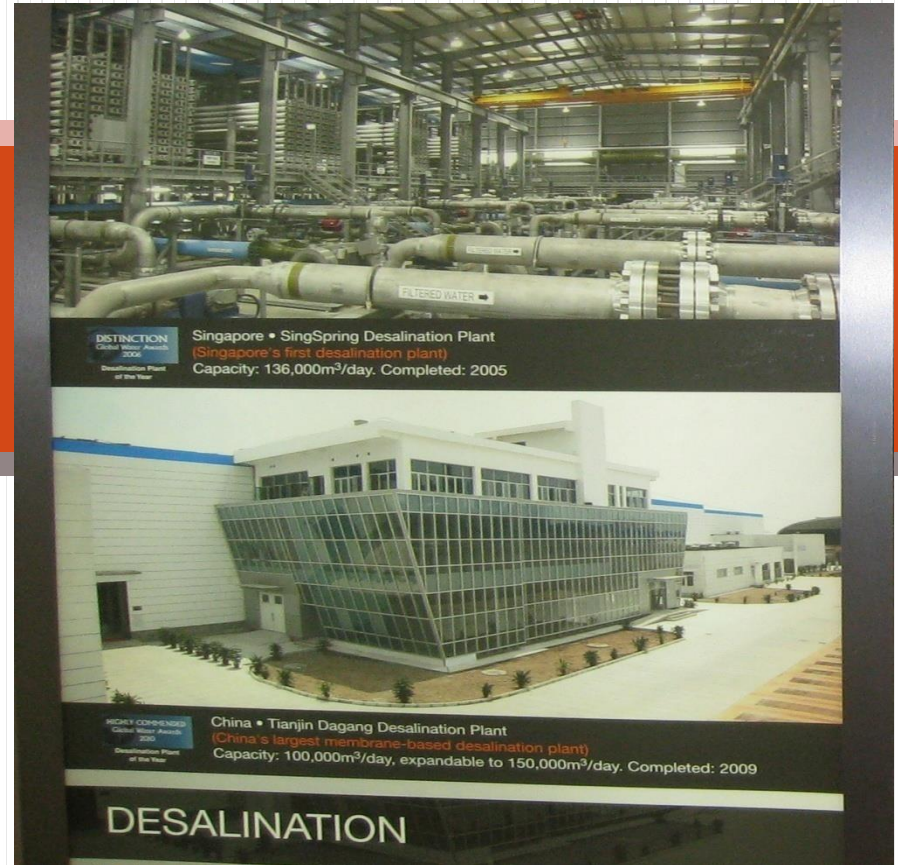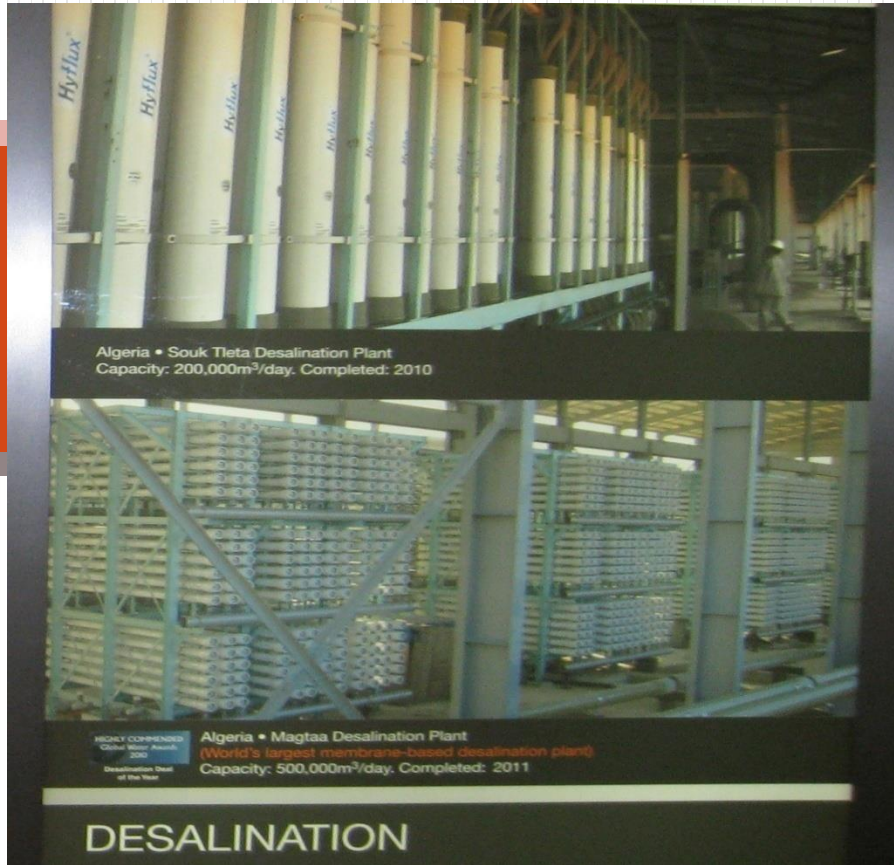

WASTE WATER




Singapore • Bedok NEWater Plant
(Singapore's first NEWater plant)
Capacity: 32,000m³/day, expandable to 88,000m³/day. Completed: 2002



China • Langfang Wastewater Treatment & Water Recycling Plant
Capacity: 80,000m³/day (wastewater treatment), 40,000m³/day (water recycling). Completed: 2007

WASTEWATER TREATMENT AND RECYCLING

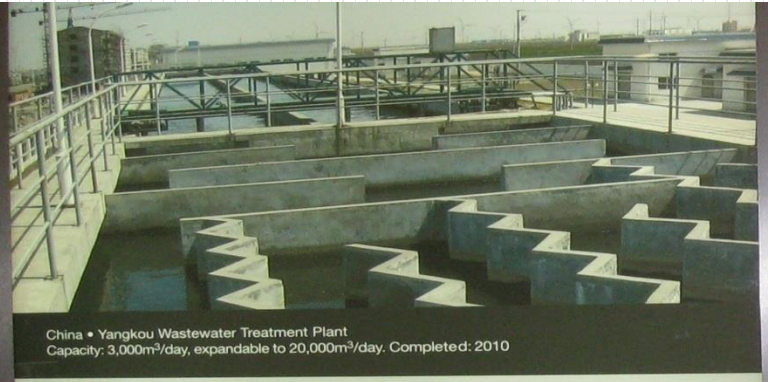


China • Yangkou Wastewater Treatment Plant
Capacity: 3,000m³/day, expandable to 20,000m³/day. Completed: 2010



Singapore • Jurong Water Reclamation Plant MBR
(Singapore's largest MBR plant)
Capacity: 68,000m³/day. Completed: 2011

WASTEWATER TREATMENT AND RECYCLING

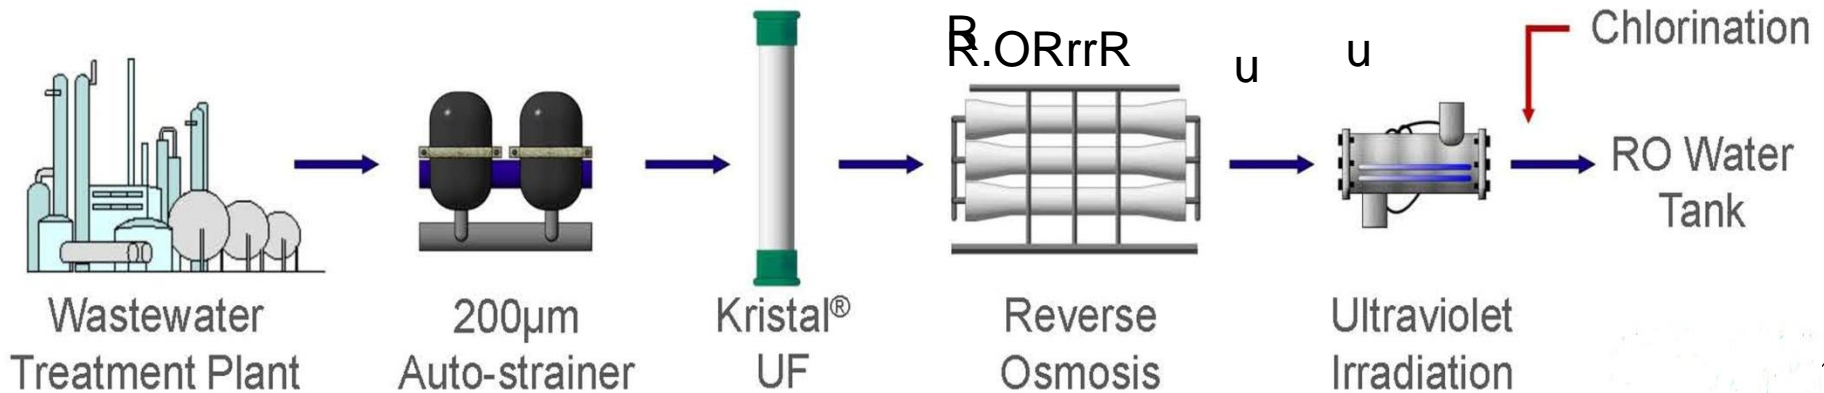


Main Air Compressor in Botadaung Township, Sewage are driven by air compressing to Treatment Plant



- ◆ Year of Establishment - **1888** year
- ◆ (6) Steam Turbine Engines
- ◆ Change of year to electrical driven -(1962-1963)
- ◆(2) Electrical Air Compressors of 200 Horse power were reinstalled
- ◆(2) Electrical Air Compressors of 120 Horse power were reinstalled
- ◆Total land areas - 2.75 acres

Layout plan of Treatment plant

Establishment of Sewage Treatment Plant

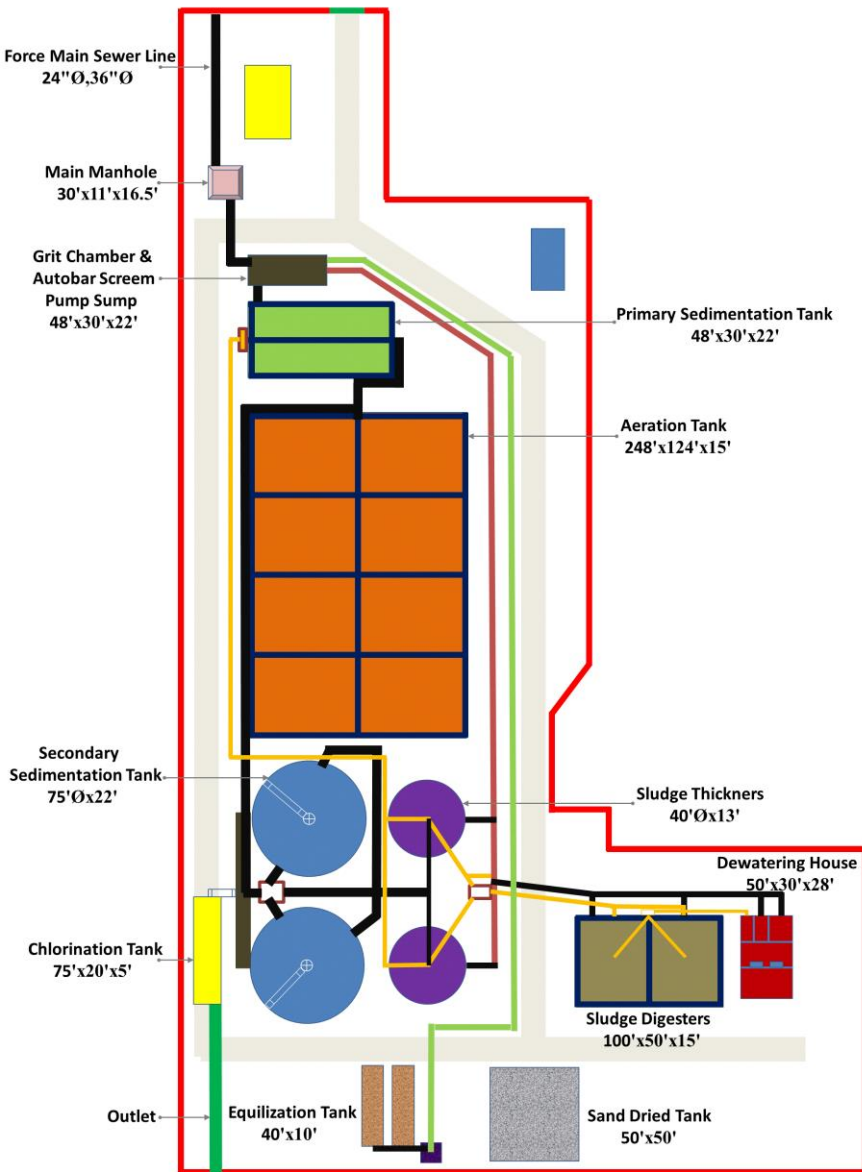


Programme for Sewage Treatment Project

- Detail Design
- Implementation
- Installation
- Commissioning
- Installation
- Training

Design Criteria:

- Area of Plant - 5.56 acres
- **Design population - 300,000**
- Daily wastewater discharge - 14775 m³/day
- **BOD influent - 600 mg / l**
- **BOD effluent - 20 mg / l**
- **Suspended solid influent- 700 mg / l**
- **Suspended solid effluent- 40 mg / l**

Microscope

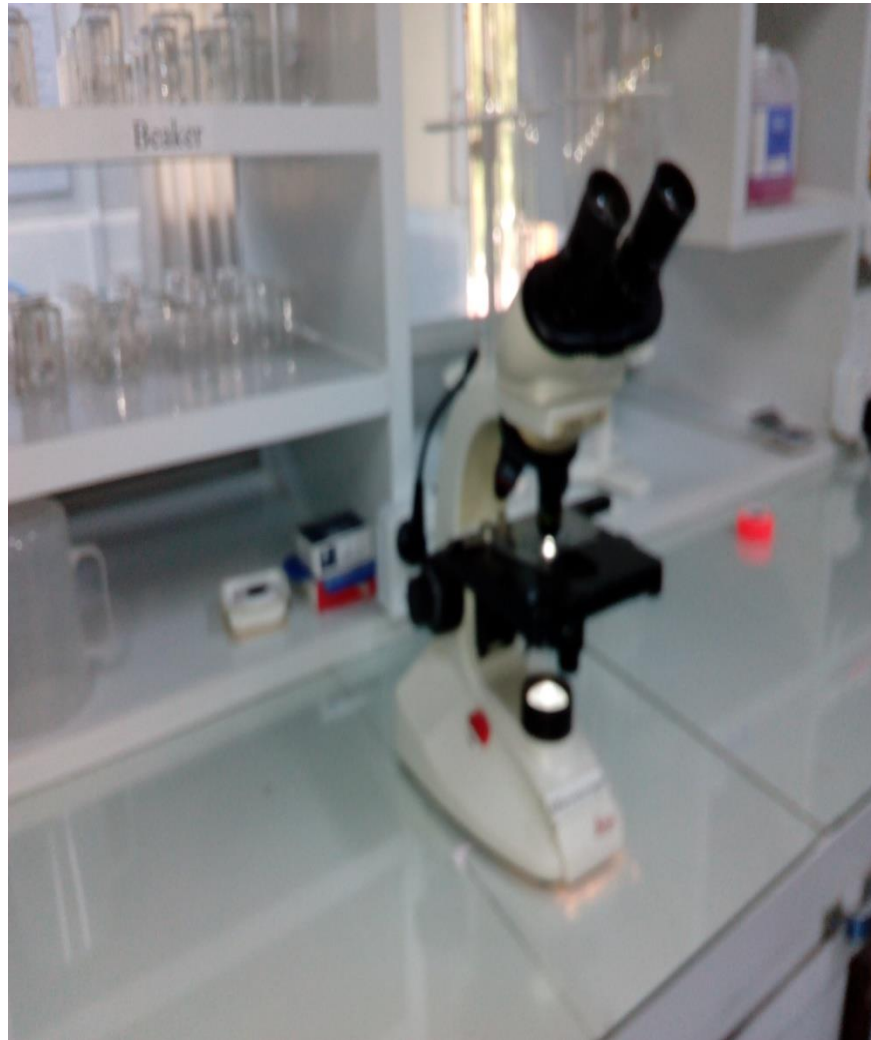

Types of bacteria occurred in activated sludge



Amoeba



Rotifer



Single stalked ciliate



Nematode




Flagellate



Free swimming ciliate



Crawling ciliate




Euglena

Sewerage System of YCDC

Estimated population with sewer(conventional sewer system) is 300,000 people . **Main content of system are**


- 1) Air Compressor Station
- 2) Pneumatic Ejectors
- 3) Air Pipeline
- 4) Gravity sewer pipeline
- 5) Wastewater Treatment Plant

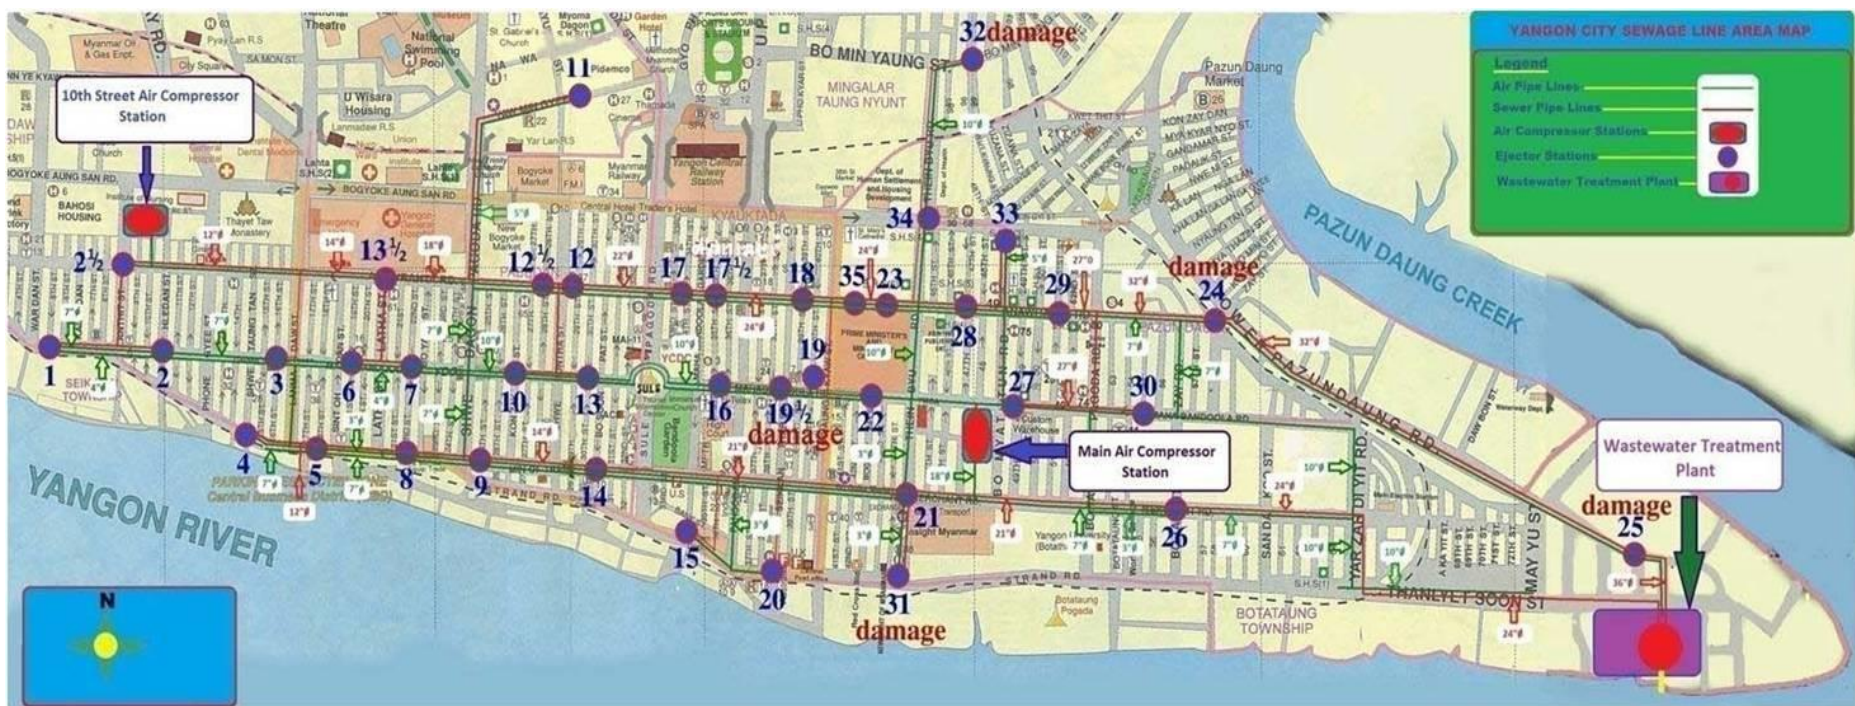

- Wastewater treatment plant
- Air compressor station
- Total length of sewer pipe line
- Sewage ejector - (35) Nos

- (10.75) km(12"CI to 36"CI Pipe)
Manholes - 2114 Nos

SEWERAGE ZONES AREA (13 ZONES)

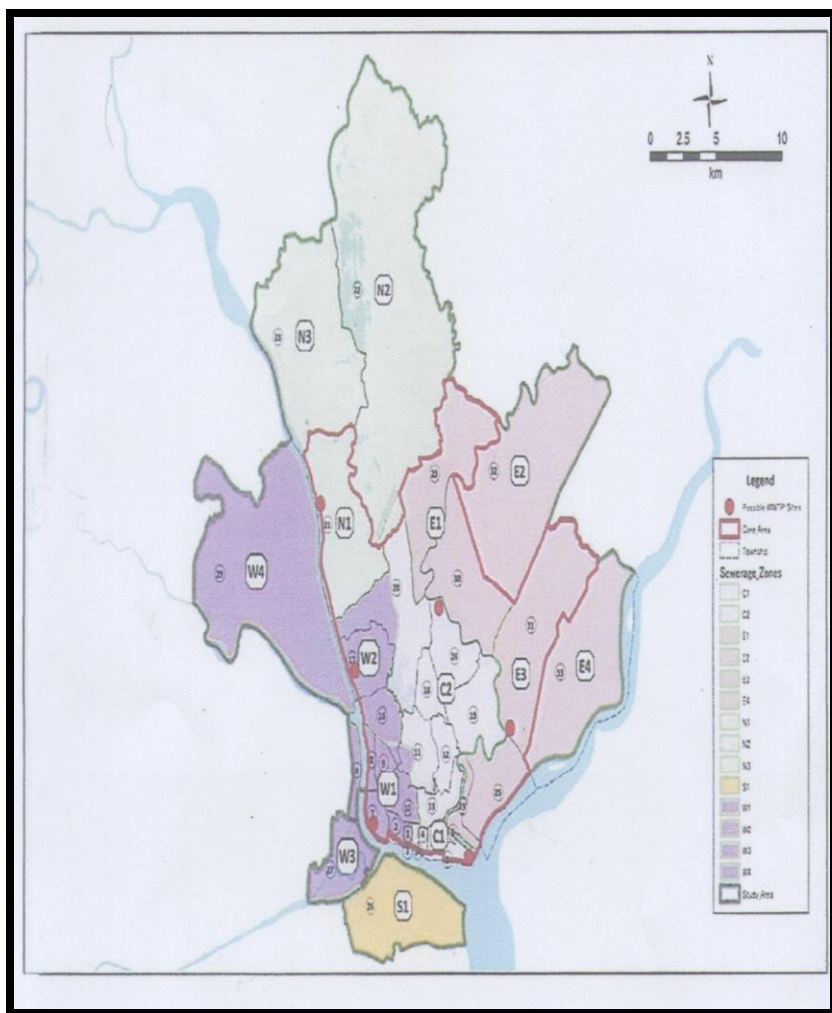


Zone	Township
C1	Botahtaung, Puzundaung, Kyauktada, Pebedam,
W1	Lanmadaw, Latha, Alone, a part of Kyeemyintdaing, Dagon, a part of Bahan, a part of Kamaryut, Sanchaung
C2+E1	a part of Bahan, Mingalartaungnyunt, Yankin, Thingangyun, Tamwe, S-Okkalapa, a part of Mayangone, N-Okkalapa, N-Dagon
W2	a part of Kamaryut, Hlaing, a part of Mayangone
E3	Taketa, Dawbon, S-Dagon
N1	Insein
E4	Dagon Seikkan
E2	East Dagon
N2	Mingalardon
N3	Shwepyithar
S1	Dala
W3	a part of Kyeemyintdaing, Seikgyi khanaungto, Seikkan
W4	Hlaing Tharyar



DRAINAGE WITH CONTOUR MAPPING

**Contour Mapping & should be disposed
to Agriculture & Low Lying Area**

Relation Between Drain Discharge and Rainfall Intensity

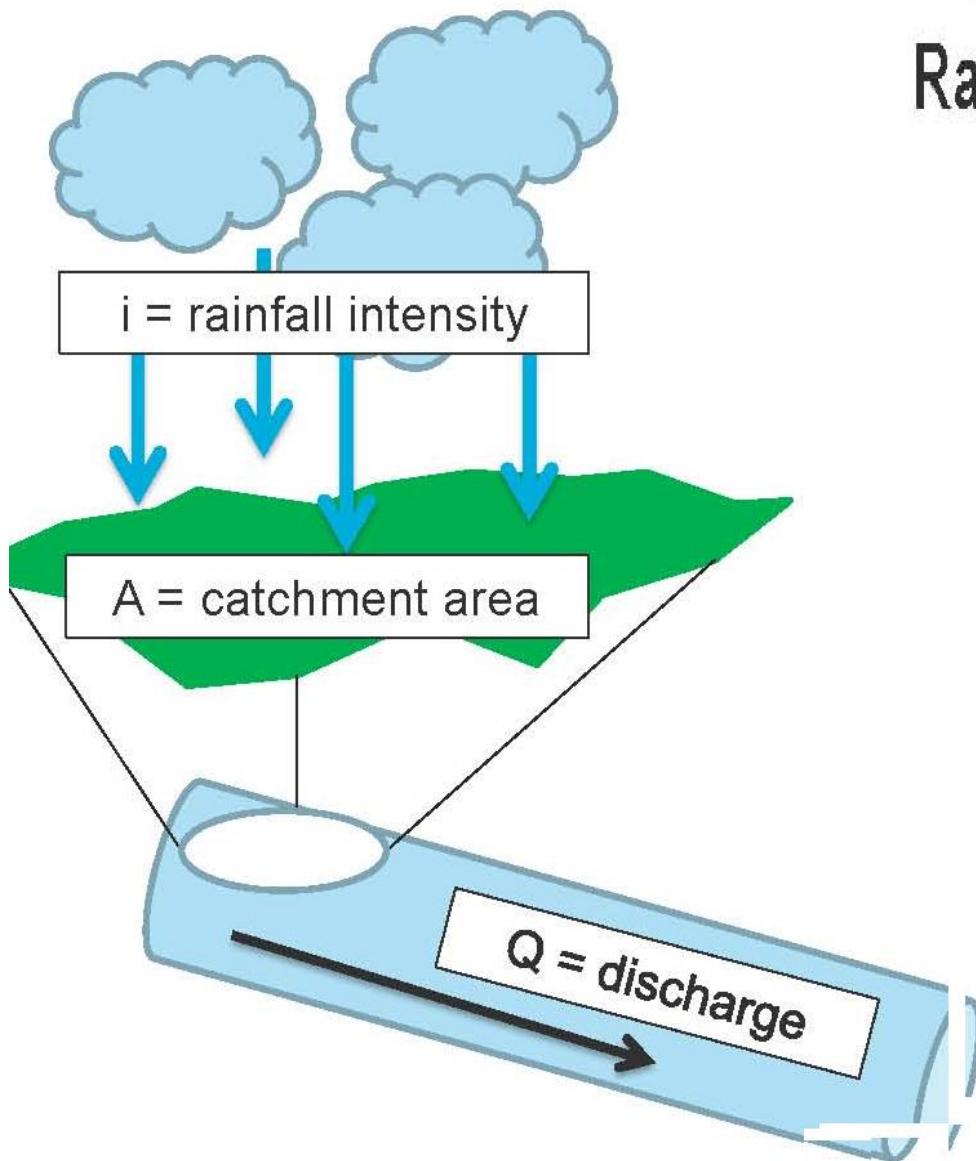

Rational method (Lloyd-Davies)

$$Q = 2.78CiA \quad [L/s]$$

- 2.78 dimensional term for unit conversion
- C runoff coefficient between 0 and 1 describing the permeability of the ground
- i rainfall intensity [mm/h]
- A catchment area [hectares]


Findings

Drip irrigation

- Drip irrigation and mulch trench systems are most appropriate (sub-surface or close to surface)
- Alternative where greywater volumes are small and soils are inappropriate for agriculture: Tower gardens


The Problem

○ Causes and Types of Urban Flooding

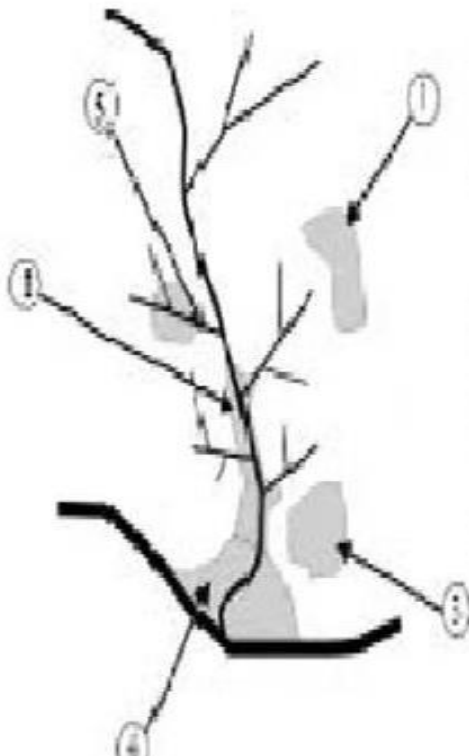

- (1) Lack of drainage infrastructure
- (2) Backup due to elevated downstream water levels
- (3) Flooding in low-lying areas
- (4) Inundation caused by high river water levels
- (5) Blockage of the drainage system

Mulch trench system

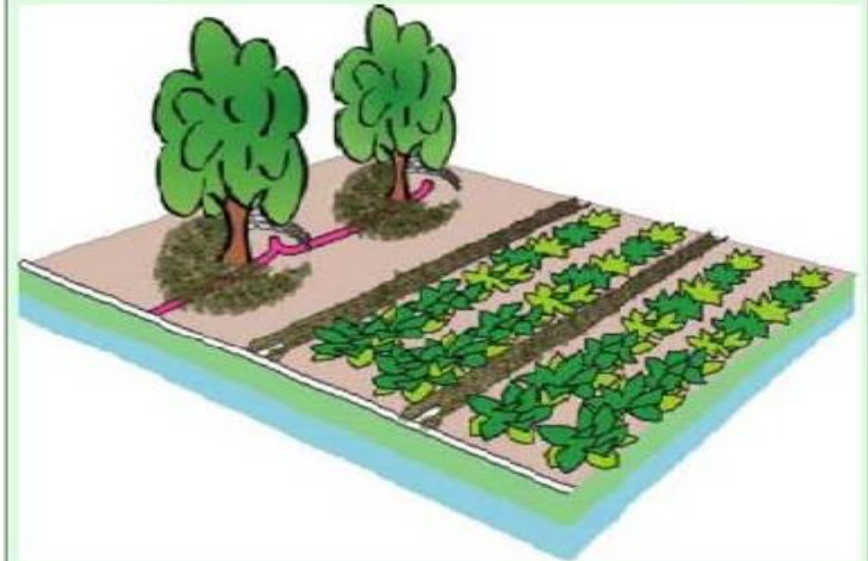

Mulch: mixture of leaves, wood, straw, ...

Enables even distribution of greywater in trenches or around trees

Requires only primary treatment

ENVIRONMENTAL MITIGATION

Global Hit

June 5 2015

Don't miss the boat


United Nations Environment Programme
World Environment Day
Every Year. Everywhere. Everyone.




In support of:



2015
TIME FOR
GLOBAL ACTION
FOR PEOPLE AND PLANET

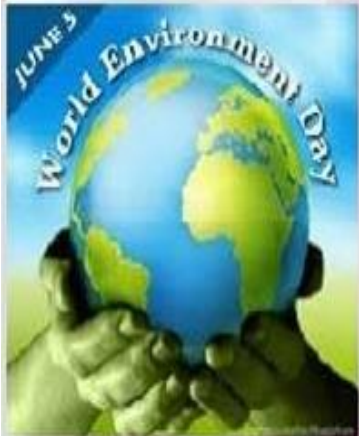

**Seven Billion Dreams.
One Planet.
Consume with Care.**

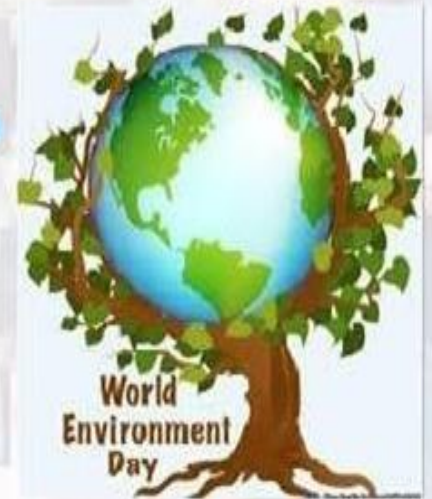

BEST WISHES



Thank You



Credtics – WHO, eawag, Dr. Pham Duc Phuc:,
Assoc. Prof. Dr. Nguyen Viet Anh, Ms. Thu Le
(MPH), CENPHER, HANOI, AIT, Bangkok, YCDC,
MES-MMR, CDD, Bangalore, India & BORDA

Innovating Life